



ODEON 4805-80 / 118

PROJECT PROJÉT
SPEC TYPE
NOTES

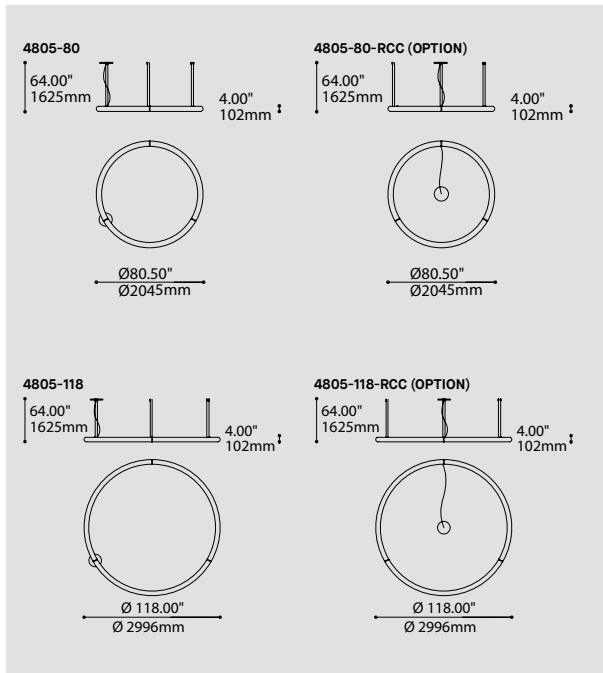

MOUNTING OPTIONS OPTIONS DE MONTAGE

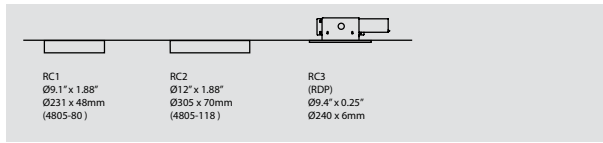


ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
4805-80	ODEON 80*	
4805-118	ODEON 118*	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27	2700K	
30	3000K	
35	3500K	
40*	4000K	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		90
90	90+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		DV
DV	0-10V DIMMING (120-277V) LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT..	
DRIVER POSITION POSITION DU PILOT		
RDP	RECESSED DRIVER* *3981D ACCESSORY IS REQUIRED	
CABLE CÂBLE		AC
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING OPTION OPTION DE MONTAGE		
RC1	FOR STANDARD Ø9.4" X 1.88", FOR 4805-80 (2475I)	
RC2	FOR STANDARD Ø12" X 1.88", FOR 4805-118 (2477I)	
RC3*	FOR RECESSED DRIVER OPTION Ø9.4" X 0.25" (2405B) * 3981D ACCESSORY REQUIRED	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		
	IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES IS STANDARD	
RCC	CENTERED ROUND CANOPY - STRAIGHT AIRCRAFT CABLES	
CANOPY FINISH FINI PAVILLON		WH
WHE	WHITE FINE TEXTURE	
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION		
WH	WHITE POWER CORD	
CLR	CLEAR POWER CORD	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	
JOINER FINISH FINI JONCTION		
CHR	CHROME	
WHE	WHITE	
ACCESSORY ACCESSOIRE		
3981D	3981D JUNCTION BOX FOR RECESSED DRIVER OPTION	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

DESIGN:	Round everybody up for an impressive show. Odeon will brighten up any large space and make a glowing statement of bold elegance.
LIGHT SOURCE:	Custom designed curving LED light engine provides even illumination over the entire surface. Available in 2700K, 3000K, 3500K and 4000K and 0-10V dimming is standard.
CONSTRUCTION:	Circles are formed from three sections of extremely durable rotomolded MDPE and are connected on-site with chromed or white joiner caps.
CERTIFIED:	c-CSA-us
CONCEPTION:	Entrez dans le cercle, contemplez ce spectacle. Odeon saura illuminer tous les grands espaces et leur donnera un éclat d'élégance audacieuse.
SOURCE LUMINEUSE:	Module DEL courbé conçu et fabriqué sur mesure, offrant une illumination uniforme sur la totalité de la surface. Disponible en 2700K, 3000K, 3500K ou 4000K avec gradation de type 0-10V.
CONSTRUCTION:	Les cercles sont faits de trois sections de MDPE rotomoulées très durables connectées lors de l'installation avec des embouts chromés ou blancs.
CERTIFIÉ:	c-CSA-us

ODEON 4805-80 / 4805-118

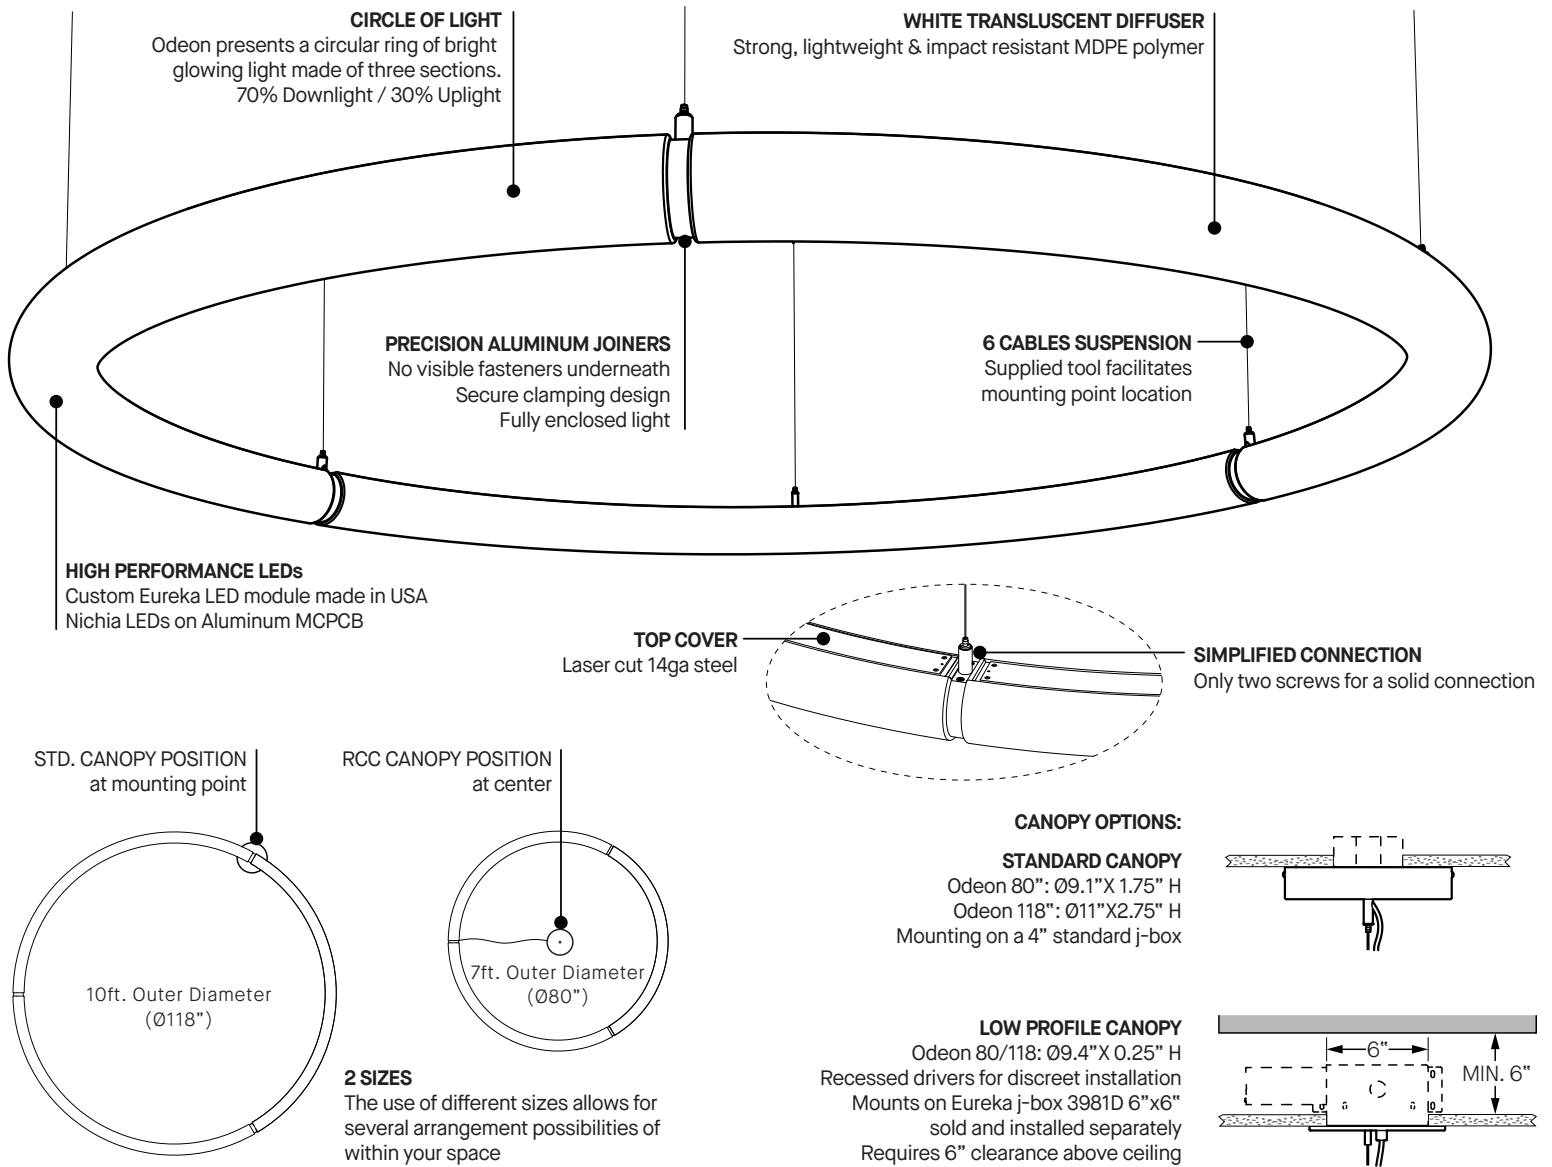


PRODUCT SPECIFICATION

	4805 - 80	4805 - 118
PERFORMANCE		
SYSTEM WATTAGE	141 W	212 W
DELIVERED LUMENS (4000K)	16282 LM	24552 LM
EFFICACY	115 LM/W	115.9 LM/W
OTHER INFORMATION		
LUMINAIRE'S WEIGHT	24 LBS / 10.8 KG	37 LBS / 16.9 KG
L70 (LUMEN MAINTENANCE)	> 60 000 HRS	> 60 000 HRS
LIGHT QUALITY	R9 > 50	R9 > 50

EFFICACY MULTIPLIERS

CCT	FACTOR
4000K	1.00
3500K	0.97
3000K	0.93
2700K	0.89

LIGHT DISTRIBUTION

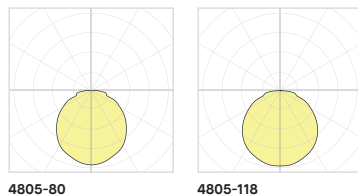


Visit our website for warranty terms and conditions.



TECHNICAL DATA

ODEON 4805-80 / 4805-118

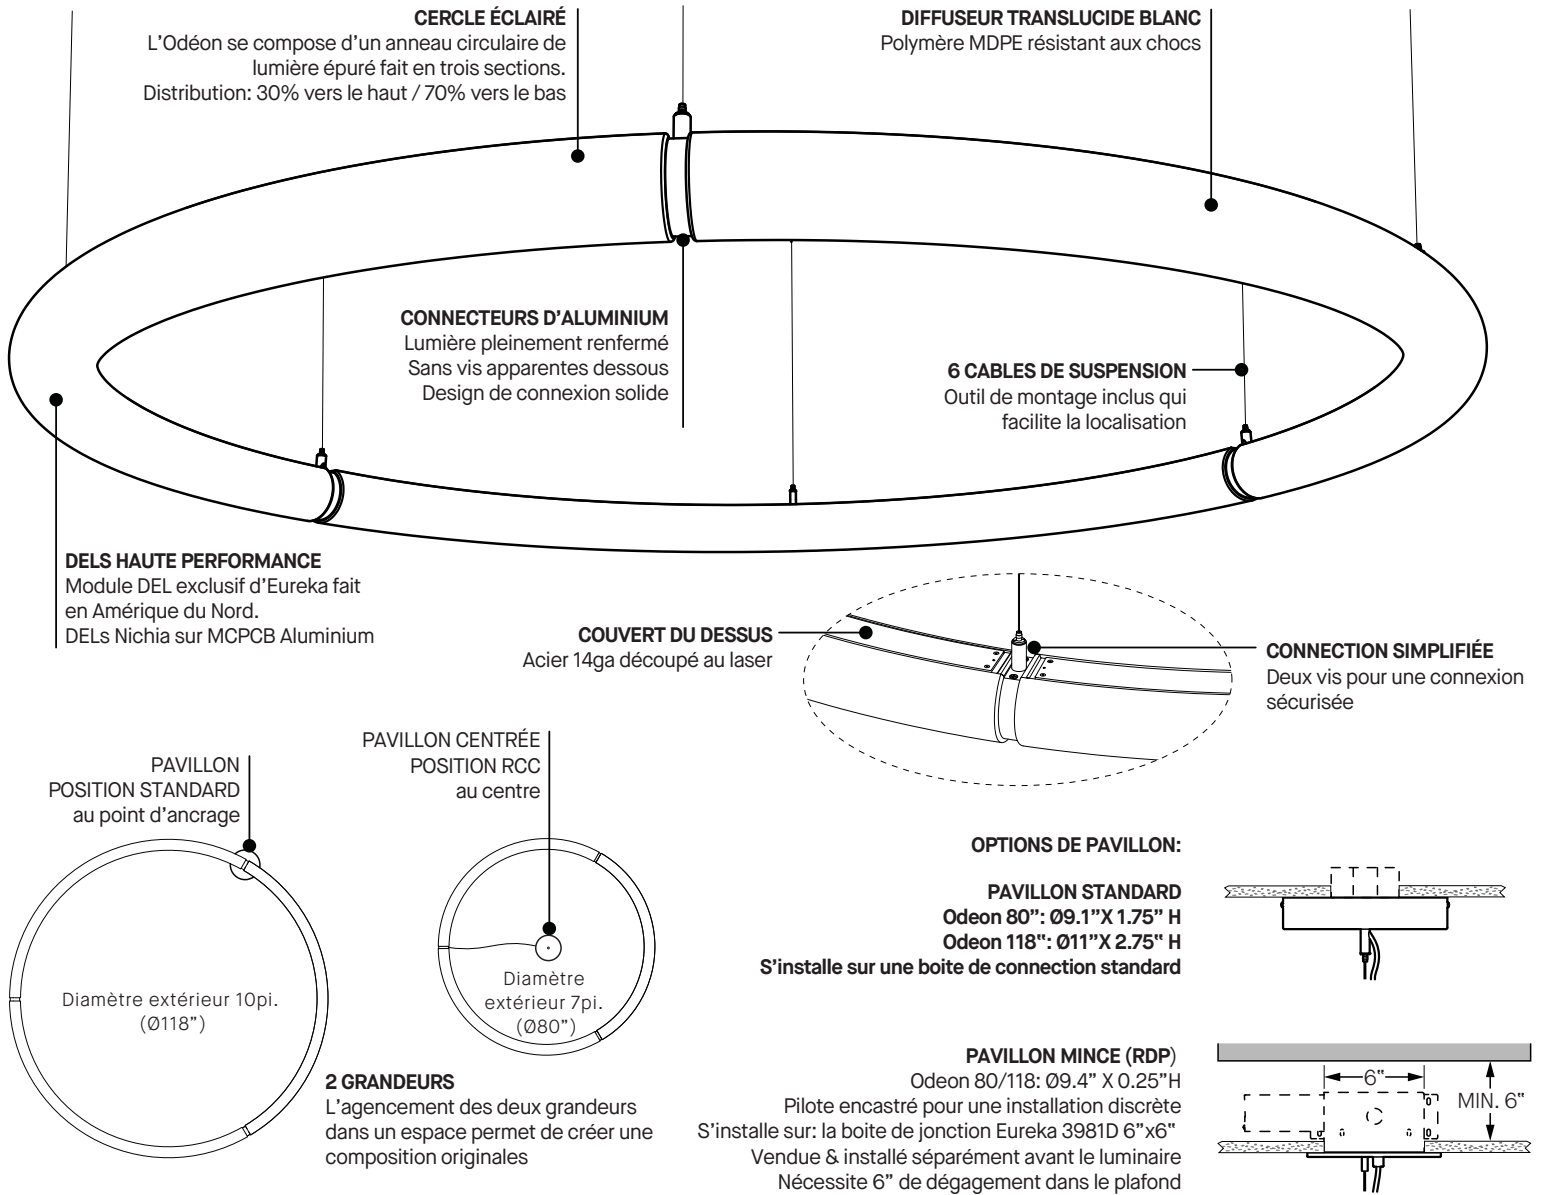


SPÉCIFICATION PRODUIT

	4805 - 80	4805 - 118
PERFORMANCE		
PUISSANCE TOTALE	141 W	212 W
LUMENS RÉELS (4000K)	16282 LM	24552 LM
EFFICACITÉ	115 LM/W	115.9 LM/W
AUTRES INFORMATIONS		
POIDS DU LUMINAIRE	24 LBS / 10.8 KG	37 LBS / 16.9 KG
L70 (MAINTENANCE DE LA LUMIÈRE)	> 60 000 H	> 60 000 H
QUALITÉ DE LA LUMIÈRE	R9 > 50	R9 > 50

FACTEUR D'EFFICACITÉ

CCT	FACTOR
4000K	1.00
3500K	0.97
3000K	0.93
2700K	0.89

DISTRIBUTION LUMINEUSE

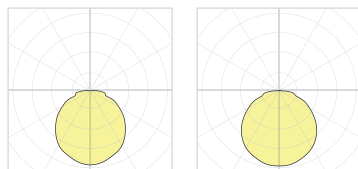

4805-80

4805-118



Visitez notre site Web pour les termes et conditions.