

TULIP 4591

PROJECT PROJET
SPEC TYPE
NOTES




DIFFUSER DIFFUSEUR




FINISH FINI



4591-12 4591-18

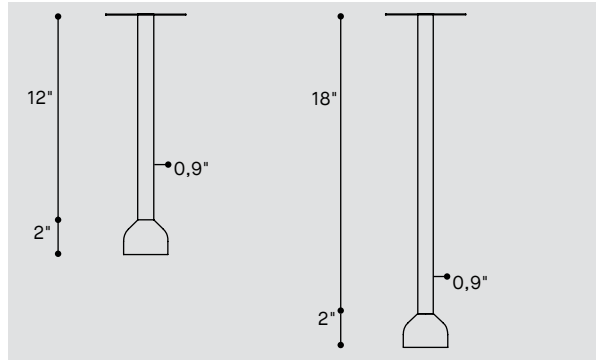

MOUNTING OPTIONS OPTIONS DE MONTAGE



PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

4591-12 SURFACE - 1 LIGHT SOURCE (SHORT)
4591-18 SURFACE - 1 LIGHT SOURCE (LONG)

DIFFUSER DIFFUSEUR

BLB BULB - RECESSED FLAT LENS (BEAM ANGLE 20°)
BUD BUD - 1" SMALL DIFFUSER, FROSTED
BSM BLOSSOM - 2" LARGE DIFFUSER, FROSTED

LIGHT SOURCE SOURCE LUMINEUSE

LED REGULAR OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

WDIM 2200K-3000K
27 2700K (STATIC WHITE)
30 3000K (STATIC WHITE)
35 3500K (STATIC WHITE)
40* 4000K (STATIC WHITE)
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

90 90+ CRI

VOLTAGE VOLTAGE

120V 120 VOLT
277V 277 VOLT

CONTROL OPTION OPTION DE CONTRÔLE

DV 0-10V DIMMING (120V-277V)
DP PHASE DIMMING (120V ONLY)
NLTAIR2* NLIGHT AIR CONTROL GEN 2
NLIGHT* NLIGHT WIRED CONTROL
* NLIGHT INTEGRATION REQUIRES THE USAGE OF A REMOTE POWER PACK (39NLA A FOR NLTAIR2 OR 39NLWA FOR NLIGHT) REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

MOUNTING MONTAGE

ROUND CANOPY / PAVILLON ROND
RC1* SCREWLESS 5.00" X 0.13"H. CANOPY (2402A)
*3983 ACCESSORY PROVIDED

TUBE AND PLATE FINISH FINI TUBE ET PLAQUE

BLKE BLACK
WHE WHITE
CHM* CHAMPAGNE METALLIC
SIM* SILVER METALLIC
AYE* APRICOT YELLOW
BRE* BRICK RED
CBE* CHOCOLATE BROWN
CPE* CLAY PINK
DBE* DYNAMIC BLUE
GGE* GRASS GREEN
HGE* HUNTER GREEN
LNE* LUNAR GREY
NBE* NAVY BLUE
SBE* SAND BEIGE
SGE* SAGE GREY
STE* SUMMER TEAL
RAL** PLEASE SPECIFY RAL CODE

* ALL FINISHES ARE FINE TEXTURED WITH THE EXCEPTION OF CHM, SIM
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE
** SPECIFY 4 DIGIT RAL CLASSIC CODE. LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

ACCESSORY ACCESSOIRE

ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING
3983 DEEP JUNCTION BOX (PROVIDED)
39NLAA* NLIGHT AIR GEN 2 REMOTE CONTROLLER
39NLWA* NLIGHT WIRED REMOTE CONTROLLER
* FOR CHICAGO PLENUM INSTALLATION. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

TULIP SURFACE 4591 - FINISH OPTIONS / OPTIONS DE FINIS

Standard



BLKE
Black Textured



WHE
White Textured

Metallic



CHM
Champagne



SIM
Silver


Premium



AYE
Apricot
Yellow
Textured



BRE
Brick Red
Textured



CBE
Chocolate
Brown
Textured



CPE
Clay Pink
Textured



DBE
Dynamic Blue
Textured



GGE
Grass Green
Textured



HGE
Hunter Green
Textured



LNE
Lunar Gray
Textured



NBE
Navy Blue
Textured



SBE
Sand Beige
Textured




SGE
Sage Gray
Textured



STE
Summer Teal
Textured

TULIP ESSENTIALS 3191/4591/4191

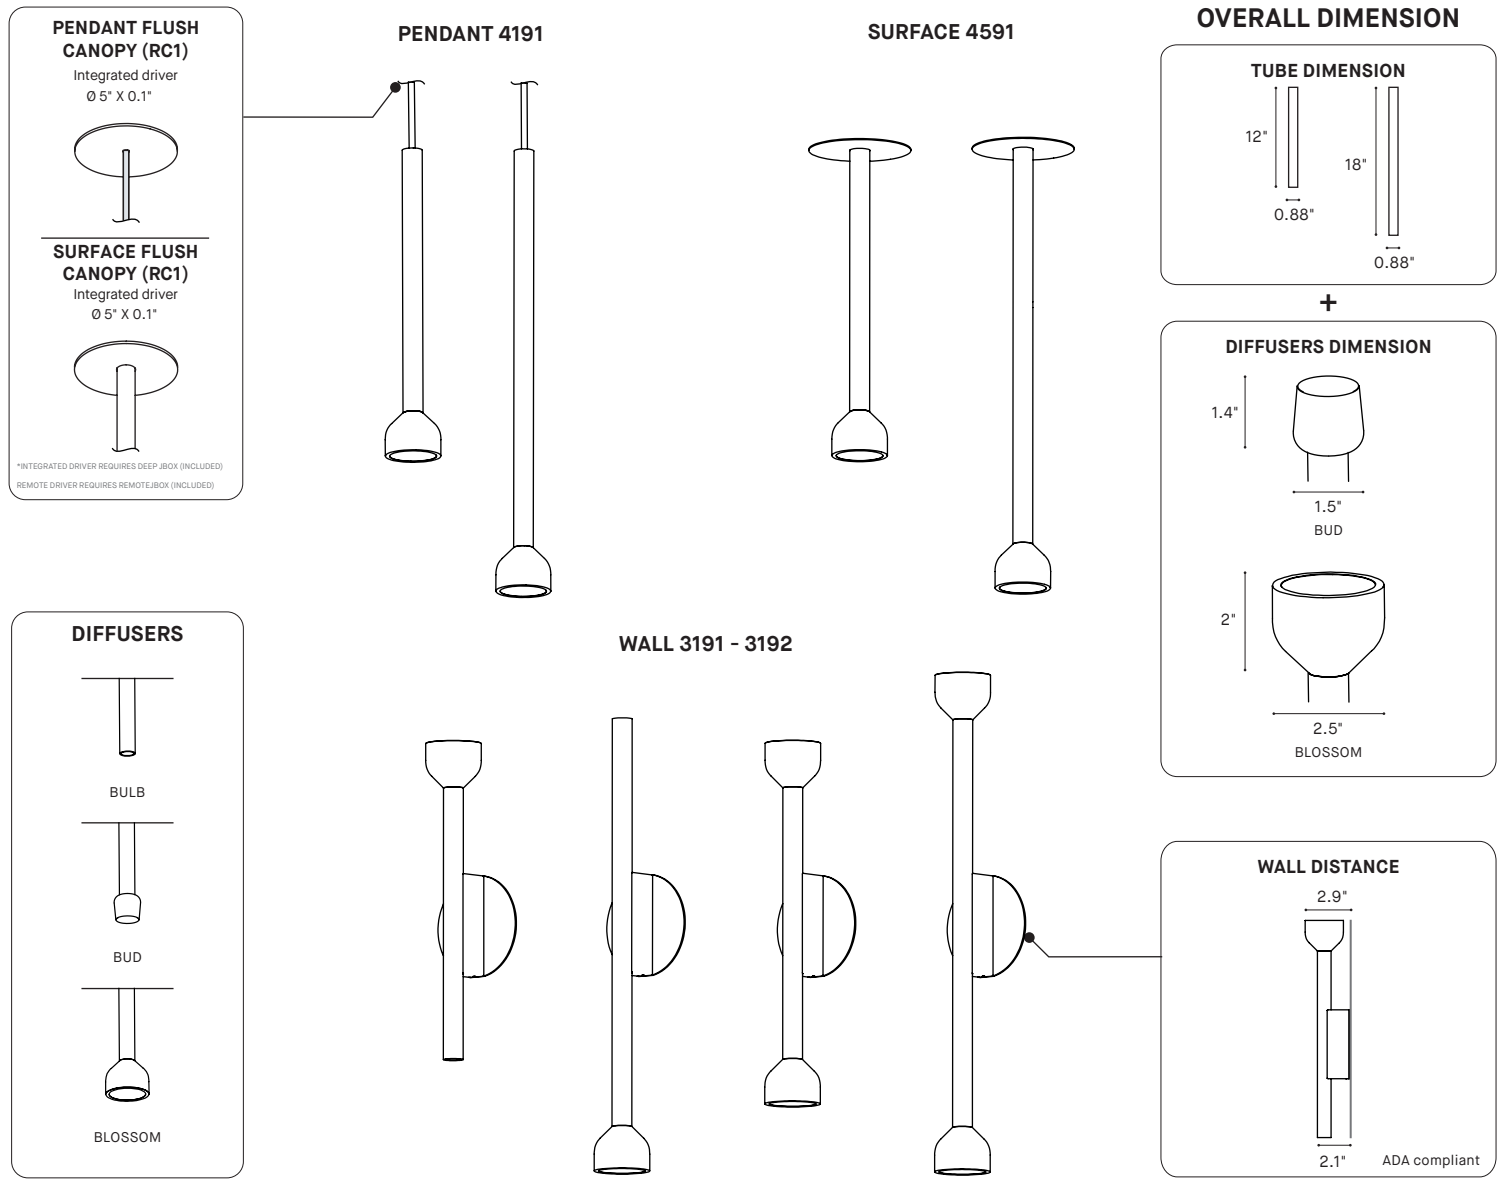

PRODUCT SPECIFICATION	1 HEAD	2 HEAD
	4191 / 4591 / 3191	3192
PERFORMANCE	BULB — BUD — BLOSSOM	BULB — BUD — BLOSSOM
SYSTEM WATTAGE	3 W	6 W
DELIVERED LUMENS (4000K)	100 — 127 — 147 LM	200 — 248 — 255 LM
EFFICACY	30 — 36 — 44 LM/W	39 — 41 — 43 LM/W
OTHER INFORMATION		
WEIGHT	2 LBS / 1 KG	2.5 LBS / 1.2 KG
L70 (LUMEN MAINTENANCE)	60,000 HRS	60,000 HRS

EFFICACY MULTIPLIERS		
CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

