

# PHOTOMETRIC REPORT

# PLATE OUT

## 3450-2xLED.40HO

|                            |                     |
|----------------------------|---------------------|
| CCT (K):                   | 4000                |
| Delivered Lumens (lm):     | 1124                |
| System wattage (W)*:       | 14.6                |
| Distribution:              | Direct towards wall |
| Delivered Efficacy (lm/W): | 77                  |
| Photometric type           | C                   |



### Luminous dimensions

|                 |            |
|-----------------|------------|
| Luminous shape: | Rectangle  |
| Units:          | in (mm)    |
| 0-180 Axis:     | 4.8 (122)  |
| 90-270 Axis:    | 2.4 (61)   |
| Height:         | 32.4 (823) |

### Luminaire spacing criteria

|                         |      |
|-------------------------|------|
| 2 luminaires, plane 0:  | 0.66 |
| 2 luminaires, plane 90: | 7.60 |
| 4 luminaires:           | 6.01 |

\*System wattage includes driver and LED modules consumption

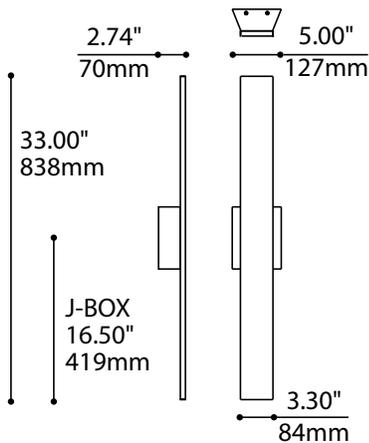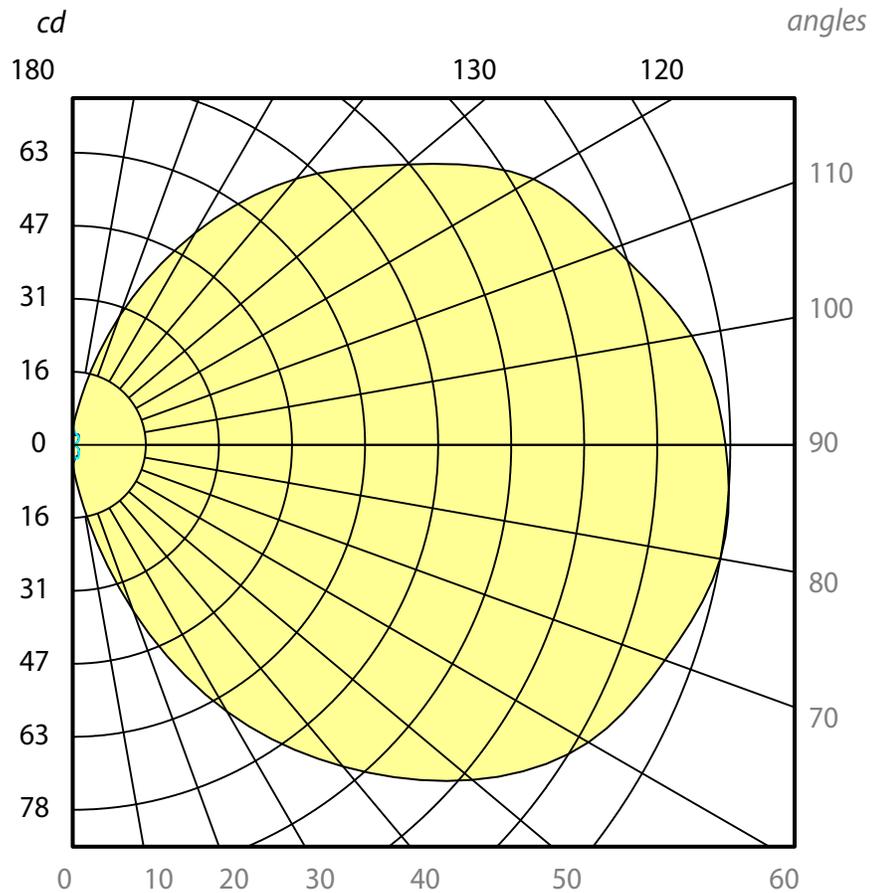

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.