

PHOTOMETRIC REPORT

ARENA-SLICE
LIGHT SOURCE FOR ARENA 8200

8293-36-LED-40-WHE-WH

CCT (K): 4000
Delivered Lumens (lm): 1046
DC Load (W): 6.0
Distribution: Direct
Delivered Efficacy (lm/W): 174
Photometric type: C

*System efficacy (lm/W) including driver is 138

Luminous dimensions

Luminous shape: Circular
Units: in (mm)
0-180 Axis: 33.6 (853)
90-270 Axis: 1.44 (37)
Height: 1 (25)

Luminaire spacing criteria

2 luminaires, plane 0: 1.14
2 luminaires, plane 90: 1.40
2 luminaires, diagonal: 1.42

8293-54-LED-40-WHE-WH

CCT (K): 4000
Delivered Lumens (lm): 1560
DC Load (W): 8.9
Distribution: Direct
Delivered Efficacy (lm/W): 175
Photometric type: C

*System efficacy (lm/W) including driver is 141

Luminous dimensions

Luminous shape: Circular
Units: in (mm)
0-180 Axis: 49.44 (1255)
90-270 Axis: 1.44 (37)
Height: 1 (25)

Luminaire spacing criteria

2 luminaires, plane 0: 1.20
2 luminaires, plane 90: 1.44
2 luminaires, diagonal: 1.46

1.46"
37mm



2.97"
75mm

49.50"
1257mm

1.46"
37mm

2.97"
75mm

33.20"
843mm

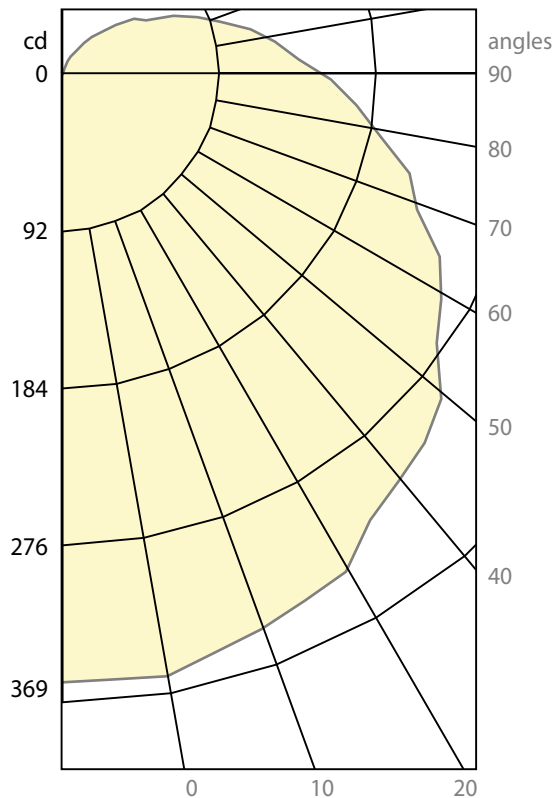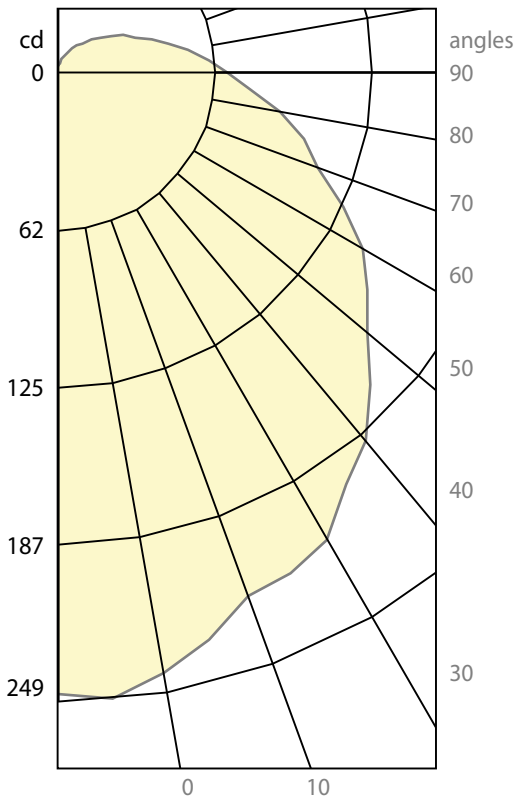

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.



8293