

# SCOUT 4048

QUICKSHIP

PROJECT PROJÉT

SPEC TYPE

NOTES



## FINISH FINI



BLKE      WHE



## OVERALL HEIGHT HAUTEUR HORS TOUT

|                 |                     |
|-----------------|---------------------|
|                 | LED<br>0.50" CANOPY |
| MOUNTING        | 2471C               |
| CABLE & 4048-6  | 69.70"              |
| CABLE & 4048-10 | 73.95"              |
| CABLE & 4048-18 | 81.45"              |

## MOUNTING OPTIONS OPTIONS DE MONTAGE



## STEM OR CABLE OPTION OPTIONS DE TIGE OU CABLE

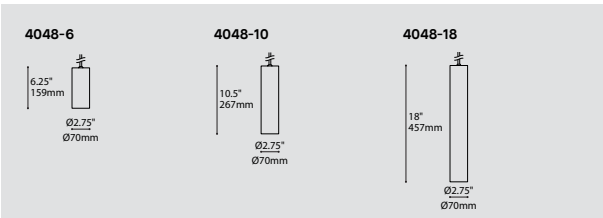

| ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE                                 |                                                     | CODE                                   |
|----------------------------------------------------------------------------------|-----------------------------------------------------|----------------------------------------|
| QUICKSHIP                                                                        |                                                     |                                        |
| QS5                                                                              | QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS                  | QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS   |
| QS10                                                                             | QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS                | QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS |
| MODEL MODÈLE                                                                     |                                                     |                                        |
| 4048-6                                                                           | SCOUT 6"                                            |                                        |
| 4048-10                                                                          | SCOUT 10"                                           |                                        |
| 4048-18                                                                          | SCOUT 18"                                           |                                        |
| LIGHT SOURCE SOURCE LUMINEUSE                                                    |                                                     |                                        |
| LED                                                                              | REGULAR OUTPUT                                      |                                        |
| LED.HO                                                                           | HIGH OUTPUT                                         |                                        |
| COLOR TEMPERATURE TEMPÉRATURE DE COULEUR                                         |                                                     |                                        |
| 30                                                                               | 3000K                                               |                                        |
| 35                                                                               | 3500K                                               |                                        |
| 40                                                                               | 4000K                                               |                                        |
| COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)                     |                                                     | 80                                     |
| 80                                                                               | 80+ CRI                                             |                                        |
| VOLTAGE VOLTAGE                                                                  |                                                     |                                        |
| 120V                                                                             | 120 VOLT                                            |                                        |
| 277V                                                                             | 277 VOLT                                            |                                        |
| DIMMING OPTION OPTION DE GRADATION                                               |                                                     |                                        |
| DV                                                                               | 0-10V DIMMING (120V-277V)                           |                                        |
| DP                                                                               | PHASE DIMMING (120V ONLY)                           |                                        |
| LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE |                                                     |                                        |
| BEAM ANGLE ANGLE DE FAISCEAU                                                     |                                                     |                                        |
| NA                                                                               | NARROW (24°)                                        |                                        |
| ME                                                                               | MEDIUM (45°)                                        |                                        |
| OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES                                         |                                                     |                                        |
| CLR                                                                              | CLEAR GLASS LENS                                    |                                        |
| FRO                                                                              | FROSTED GLASS LENS                                  |                                        |
| HON                                                                              | HONEYCOMB LOUVER                                    |                                        |
| SOL                                                                              | SOLITE SOFTENING LENS                               |                                        |
| CABLE CABLE                                                                      |                                                     | C                                      |
| C *                                                                              | BLACK OR WHITE CABLE, FIELD ADJUSTABLE              |                                        |
| *FOR WHITE STRUCTURE: WHITE CABLE, FOR OTHER STRUCTURE FINISH: BLACK CABLE       |                                                     |                                        |
| CABLE LENGTH LONGUEUR DE CABLE                                                   |                                                     |                                        |
| 60                                                                               | 60" CABLE (STD LENGTH)                              |                                        |
| **                                                                               | CUSTOM CABLE LENGTH (PLEASE SPECIFY)                |                                        |
| FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE                    |                                                     |                                        |
| MOUNTING MONTAGE                                                                 |                                                     | RC                                     |
| RC                                                                               | ROUND CANOPY / PAVILLON ROND                        |                                        |
| SCREWLESS 0.5" CANOPY (2471C)                                                    |                                                     |                                        |
| CANOPY FINISH FINI PAVILLON                                                      |                                                     |                                        |
| BLKE                                                                             | BLACK FINE TEXTURE                                  |                                        |
| WHE                                                                              | WHITE FINE TEXTURE                                  |                                        |
| CYLINDER FINISH FINI CYLINDRE                                                    |                                                     |                                        |
| BLKE                                                                             | BLACK FINE TEXTURE                                  |                                        |
| WHE                                                                              | WHITE FINE TEXTURE                                  |                                        |
| BAFFLE FINISH FINI DÉFLECTEUR                                                    |                                                     |                                        |
| BLKE                                                                             | BLACK FINE TEXTURE                                  |                                        |
| WHE                                                                              | WHITE FINE TEXTURE                                  |                                        |
| ACCESSORY ACCESSOIRE                                                             |                                                     |                                        |
| 3983                                                                             | DEEP JUNCTION BOX (PROVIDED FOR 4048-6 WITH CANOPY) |                                        |

SCOUT 4049

QUICKSHIP

PROJECT PROJÉT

SPEC TYPE

NOTES



FINISH FINI




BLKE                      WHE



OVERALL HEIGHT    HAUTEUR HORS TOUT

|                 |                     |
|-----------------|---------------------|
|                 | LED<br>0.50" CANOPY |
| MOUNTING        | 2471C               |
| CABLE & 4049-6  | 69.70"              |
| CABLE & 4049-10 | 73.95"              |
| CABLE & 4049-18 | 81.45"              |

MOUNTING OPTIONS    OPTIONS DE MONTAGE



STEM OR CABLE OPTION    OPTIONS DE TIGE OU CABLE

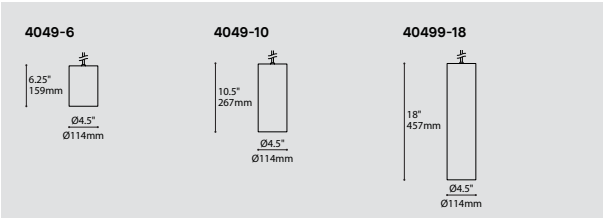

| ORDERING SPECIFICATION    SPÉCIFICATION DE COMMANDE             |                                                                                  | CODE |
|-----------------------------------------------------------------|----------------------------------------------------------------------------------|------|
| QUICKSHIP                                                       |                                                                                  |      |
| QS5                                                             | QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS    QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS       |      |
| QS10                                                            | QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS    QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS   |      |
| MODEL    MODÈLE                                                 |                                                                                  |      |
| 4049-6                                                          | SCOUT 6"                                                                         |      |
| 4049-10                                                         | SCOUT 10"                                                                        |      |
| 4049-18                                                         | SCOUT 18"                                                                        |      |
| LIGHT SOURCE    SOURCE LUMINEUSE                                |                                                                                  |      |
| LED                                                             | REGULAR OUTPUT                                                                   |      |
| LED.HO                                                          | HIGH OUTPUT                                                                      |      |
| COLOR TEMPERATURE    TEMPÉRATURE DE COULEUR                     |                                                                                  |      |
| 30                                                              | 3000K                                                                            |      |
| 35                                                              | 3500K                                                                            |      |
| 40                                                              | 4000K                                                                            |      |
| COLOR RENDERING INDEX (CRI)    INDICE DE RENDU DE COULEUR (IRC) |                                                                                  | 80   |
| 80                                                              | 80+ CRI                                                                          |      |
| VOLTAGE    VOLTAGE                                              |                                                                                  |      |
| 120V                                                            | 120 VOLT                                                                         |      |
| 277V                                                            | 277 VOLT                                                                         |      |
| DIMMING OPTION    OPTION DE GRADATION                           |                                                                                  |      |
| DV                                                              | 0-10V DIMMING (120V-277V)                                                        |      |
| DP                                                              | PHASE DIMMING (120V ONLY)                                                        |      |
|                                                                 | LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE |      |
| BEAM ANGLE    ANGLE DE FAISCEAU                                 |                                                                                  |      |
| NA                                                              | NARROW (28°)                                                                     |      |
| ME                                                              | MEDIUM (48°)                                                                     |      |
| WI                                                              | WIDE (64°)                                                                       |      |
| OPTICAL ACCESSORIES    ACCESSOIRES OPTIQUES                     |                                                                                  |      |
| CLR                                                             | CLEAR GLASS LENS                                                                 |      |
| FRO                                                             | FROSTED GLASS LENS                                                               |      |
| HON                                                             | HONEYCOMB LOUVER                                                                 |      |
| SOL                                                             | SOLITE SOFTENING LENS                                                            |      |
| CABLE    CABLE                                                  |                                                                                  | C    |
| C*                                                              | BLACK OR WHITE CABLE, FIELD ADJUSTABLE                                           |      |
|                                                                 | *FOR WHITE STRUCTURE: WHITE CABLE, FOR OTHER STRUCTURE FINISH: BLACK CABLE       |      |
| CABLE LENGTH    LONGUEUR DE CABLE                               |                                                                                  |      |
| 60                                                              | 60" CABLE (STD LENGTH)                                                           |      |
| **                                                              | CUSTOM CABLE LENGTH (PLEASE SPECIFY)                                             |      |
|                                                                 | FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE                    |      |
| MOUNTING    MONTAGE                                             |                                                                                  | RC   |
| RC                                                              | ROUND CANOPY / PAVILLON ROND                                                     |      |
|                                                                 | SCREWLESS 0,5" CANOPY (2471C)                                                    |      |
| CANOPY FINISH    FINI PAVILLON                                  |                                                                                  |      |
| BLKE                                                            | BLACK FINE TEXTURE                                                               |      |
| WHE                                                             | WHITE FINE TEXTURE                                                               |      |
| CYLINDER FINISH    FINI CYLINDRE                                |                                                                                  |      |
| BLKE                                                            | BLACK FINE TEXTURE                                                               |      |
| WHE                                                             | WHITE FINE TEXTURE                                                               |      |
| BAFFLE FINISH    FINI DÉFLECTEUR                                |                                                                                  |      |
| BLKE                                                            | BLACK FINE TEXTURE                                                               |      |
| WHE                                                             | WHITE FINE TEXTURE                                                               |      |
| ACCESSORY    ACCESSOIRE                                         |                                                                                  |      |
| 3983                                                            | DEEP JUNCTION BOX (PROVIDED FOR 4049-6 WITH CANOPY)                              |      |

4048-6

6,25"  
159mm

Ø2,75"  
Ø70mm

4049-6

Ø4,5"  
Ø114mm

4048-10

10,5"  
267mm

Ø2,75"  
Ø70mm

4049-10

Ø4,5"  
Ø114mm

4048-18

18"  
457mm

Ø2,75"  
Ø70mm

4049-18

Ø4,5"  
Ø114mm

3 MOUNTING OPTIONS

Pendant version designed with a single black or white cable or stem, easy to install and adjust on site. Thin and discreet magnetic canopy. Also available as ceiling and wall mount.

6 FORMATS

Machined aluminium cylindrical structure.

2 DIMMING TYPE

Standard phase dimming (DP) or 0-10V dimming (DV). Integrated LED driver (404x-10 et 404x-18). Deep junction box (3983) included (404x-6).

2 OUTPUTS & 3 CCT

Extruded aluminium heatsink designed to efficiently offer regular and high output.

16 CYLINDER AND BAFFLE FINISHES

Many options offered in fine textured or metallic finish to fit your needs.

REFLECTORS & 3 OPTICAL ACCESSORIES

Narrow, medium or wide (xx49 only) beam angle reflector. Choice of optical accessories : clear lens, frosted lens or honeycomb louver.

| PRODUCT SPECIFICATION    | XX48-NA                                               |           | XX48-ME                                               |           | XX49-NA                                               |          | XX49-ME                                               |           | XX49-WI                                               |         |
|--------------------------|-------------------------------------------------------|-----------|-------------------------------------------------------|-----------|-------------------------------------------------------|----------|-------------------------------------------------------|-----------|-------------------------------------------------------|---------|
| PERFORMANCE              | REG                                                   | HO        | REG                                                   | HO        | REG                                                   | HO       | REG                                                   | HO        | REG                                                   | HO      |
| SYSTEM WATTAGE           | 9.5W                                                  | 13.6W     | 9.5W                                                  | 13.6W     | 13.7W                                                 | 20W      | 13.7W                                                 | 20W       | 13.7W                                                 | 20W     |
| DELIVERED LUMENS (4000K) | 1051 LM                                               | 1425 LM   | 1051 LM                                               | 1425 LM   | 1394 LM                                               | 1907 LM  | 1509 LM                                               | 2070 LM   | 1472 LM                                               | 2021LM  |
| EFFICACY                 | 110.6LM/W                                             | 104.7LM/W | 110.6LM/W                                             | 104.7LM/W | 101.7LM/W                                             | 95.4LM/W | 110.1M/W                                              | 103.5LM/W | 107.4M/W                                              | 101LM/W |
| OTHER INFORMATIONS       |                                                       |           |                                                       |           |                                                       |          |                                                       |           |                                                       |         |
| BEAM ANGLE               | 24°                                                   |           | 45°                                                   |           | 28°                                                   |          | 48°                                                   |           | 64°                                                   |         |
| LUMINAIRE'S WEIGHT       | 1.44KG / 1.63KG / 1.96KG<br>3.16LBS/ 3.58LBS/ 4.32LBS |           | 1.44KG / 1.63KG / 1.96KG<br>3.16LBS/ 3.58LBS/ 4.32LBS |           | 1.87KG / 2.24KG / 2.75KG<br>4.12LBS/ 4.92LBS/ 6.05LBS |          | 1.87KG / 2.24KG / 2.75KG<br>4.12LBS/ 4.92LBS/ 6.05LBS |           | 1.87KG / 2.24KG / 2.75KG<br>4.12LBS/ 4.92LBS/ 6.05LBS |         |
| L70 (LUMEN MAINTENANCE)  | > 63 600 HRS                                          |           |                                                       |           |                                                       |          |                                                       |           |                                                       |         |

EFFICACY MULTIPLIERS

| CRI | CCT   | FACTOR |
|-----|-------|--------|
| 80+ | 4000K | 1.0    |
| 80+ | 3500K | 0.99   |
| 80+ | 3000K | 0.97   |
| 80+ | 2700K | 0.94   |
| 90+ | 4000K | 0.89   |
| 90+ | 3500K | 0.86   |
| 90+ | 3000K | 0.84   |
| 90+ | 2700K | 0.80   |

LIGHT DISTRIBUTION

XX48 NARROW

XX48 MEDIUM

XX49 NARROW

XX49 MEDIUM

XX49 WIDE

5 years warranty

FC

US

Visit our website for warranty terms and conditions.

TECHNICAL DATA

All right reserved and all designs protected by copyrights. Eureka Lighting reserves the right to change or modify specification without notification.

V1.2 — 2025.05

4048-6

6,25"  
159mm

Ø2,75"  
Ø70mm

4049-6

Ø4,5"  
Ø114mm

4048-10

10,5"  
267mm

Ø2,75"  
Ø70mm

4049-10

Ø4,5"  
Ø114mm

4048-18

18"  
457mm

Ø2,75"  
Ø70mm

4049-18

Ø4,5"  
Ø114mm

3 OPTIONS DE MONTAGE

Suspension sur câble d'alimentation ou tige noir ou blanc, facile à installer et ajuster sur le site. Pavillon magnétique mince et discret. Aussi disponible en version plafonnier et murale.

6 FORMATS

Structure cylindrique en aluminium usiné.

2 TYPES DE GRADATION

Gradation de type phase (DP) ou 0-10V (DV). Unité d'alimentation intégrée (modèles 404x-10 et 404x-18). Boîte de jonction octogonale profonde 3983 incluse (modèle 404x-6).

2 PUISSANCES & 3 TEMPÉRATURES DE COULEUR

Dissipateur thermique extrudé en aluminium efficace permettant d'offrir deux puissances différentes.

16 FINIS DE CYLINDRE ET DÉFLECTEUR

Plusieurs options de finition architecturale finement texturée ou métallique pour tous vos besoins.

RÉFLECTEURS & 3 ACCESSOIRES OPTIQUES


Réflecteurs offrant un faisceau lumineux étroit, moyen ou large (xx49 seulement). Choix d'accessoires optiques : lentille claire, lentille givrée ou grille en nid d'abeille.

| SPECIFICATION PRODUIT           | XX48-NA                   |           | XX48-ME                   |           | XX49-NA                   |          | XX49-ME                   |           | XX49-WI                   |         |
|---------------------------------|---------------------------|-----------|---------------------------|-----------|---------------------------|----------|---------------------------|-----------|---------------------------|---------|
| PERFORMANCE                     | REG                       | HO        | REG                       | HO        | REG                       | HO       | REG                       | HO        | REG                       | HO      |
| PUISSANCE TOTALE                | 9.5W                      | 13.6W     | 9.5W                      | 13.6W     | 13.7W                     | 20W      | 13.7W                     | 20W       | 13.7W                     | 20W     |
| LUMENS RÉELS (4000K)            | 1051 LM                   | 1425 LM   | 1051 LM                   | 1425 LM   | 1394 LM                   | 1907 LM  | 1509 LM                   | 2070 LM   | 1472 LM                   | 2021 LM |
| EFFICACITÉ                      | 110.6LM/W                 | 104.7LM/W | 110.6LM/W                 | 104.7LM/W | 101.7LM/W                 | 95.4LM/W | 110.1M/W                  | 103.5LM/W | 107.4M/W                  | 101LM/W |
| AUTRES INFORMATIONS             |                           |           |                           |           |                           |          |                           |           |                           |         |
| ANGLE DE RAYONNEMENT            | 24°                       |           | 45°                       |           | 28°                       |          | 48°                       |           | 64°                       |         |
| POIDS DU LUMINAIRE              | 1.44KG / 1.63KG / 1.96KG  |           | 1.44KG / 1.63KG / 1.96KG  |           | 1.87KG / 2.24KG / 2.75KG  |          | 1.87KG / 2.24KG / 2.75KG  |           | 1.87KG / 2.24KG / 2.75KG  |         |
| L70 (MAINTENANCE DE LA LUMIÈRE) | 3.16LBS/ 3.58LBS/ 4.32LBS |           | 3.16LBS/ 3.58LBS/ 4.32LBS |           | 4.12LBS/ 4.92LBS/ 6.05LBS |          | 4.12LBS/ 4.92LBS/ 6.05LBS |           | 4.12LBS/ 4.92LBS/ 6.05LBS |         |
|                                 | > 63 600 H                |           | > 63 600 H                |           | > 63 600 H                |          | > 63 600 H                |           | > 63 600 H                |         |

FACTEUR D'EFFICACITÉ

| IRC | CCT   | FACTEUR |
|-----|-------|---------|
| 80+ | 4000K | 1.0     |
| 80+ | 3500K | 0.99    |
| 80+ | 3000K | 0.97    |
| 80+ | 2700K | 0.94    |
| 90+ | 4000K | 0.89    |
| 90+ | 3500K | 0.86    |
| 90+ | 3000K | 0.84    |
| 90+ | 2700K | 0.80    |

DISTRIBUTION LUMINEUSE

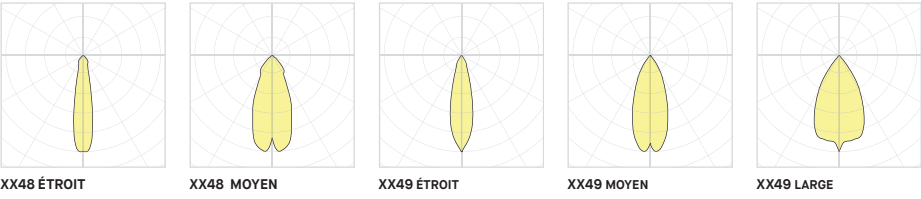

5

ans de garantie

Visitez notre site Web pour les termes et conditions.