






# **HENRI 4275-XX**



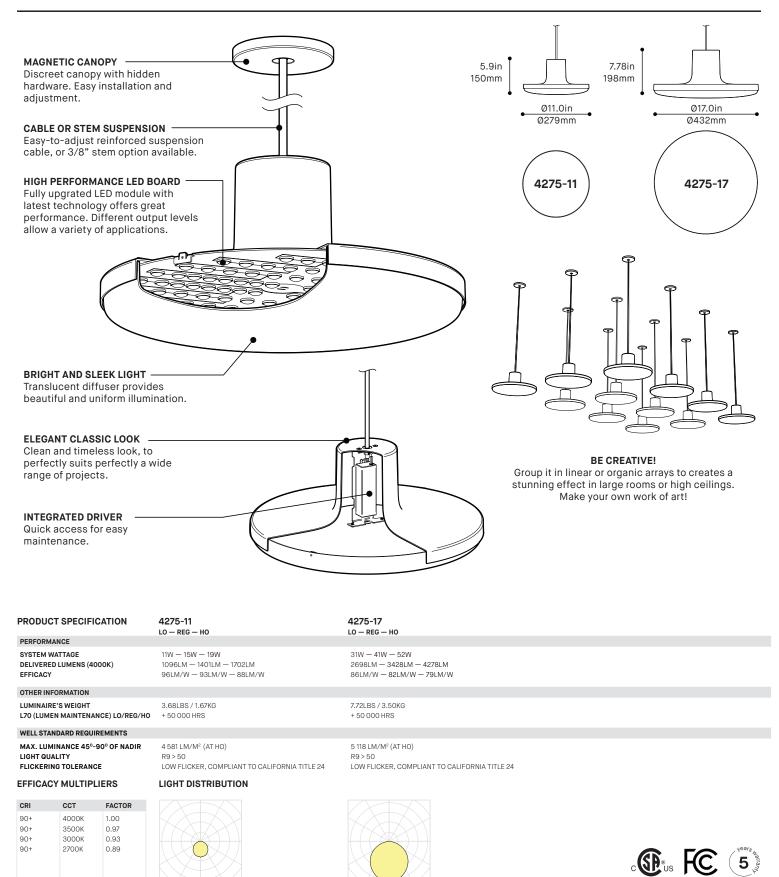

4275-11


4275-17

V1.0 - 2021.10

**TECHNICAL DATA** 





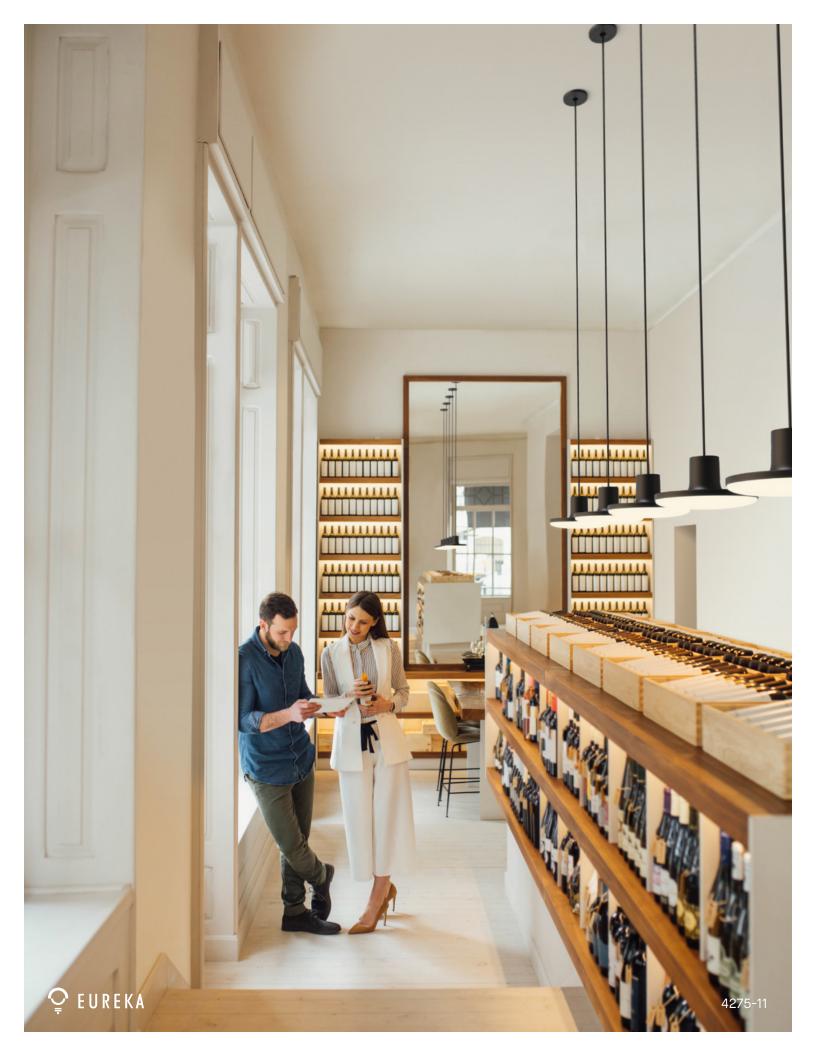


# **HENRI 4275**

PROJECT PROJET

SPEC TYPE
-----------







FINISH FINI







OVERALL HEIGHT HAUTEUR HORS TOUT




STEM OR CABLE OPTION OPTIONS DE TIGE OU CABLE



MOUNTING OPTIONS OPTIONS DE MONTAGE





	DÈLE	
4275-11	HENRI 11"	
4275-17	HENRI 17"	
LIGHT SOUR	CE SOURCE LUMINEUSE	
LED.LO	LOW OUTPUT	
LED.REG LED.HO	REGULAR OUTPUT HIGH OUTPUT	
COLOR TEMP	PERATURE TEMPÉRATURE DE COULEUR	
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
	DERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)	ç
90	90+ CRI	
VOLTAGE V	DLTAGE	
120V	120 VOLT	
277V	277 VOLT	
CONTROL OF	TION OPTION DE CONTRÔLE	
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL * NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT)	
	*NLIGHT IN LEGRATION REQUIRES A REMOTE POWER PACK (SMRLAD FOR NLIAR2 OR SMRLWB FOR NLIGHT) REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS. EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTION.	
EMERGENCY	BATTERY BATTERIE D'URGENCE	
FOR 120-277V C	INLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.	
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
	* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION	
STEM OR CA	BLE TIGE OU CÂBLE	
C*	BLACK OR WHITE CABLE, FIELD ADJUSTABLE	
S10*	BLACK OR WHITE 3/8" (10MM) STEM, NOT FIELD ADJUSTABLE	
STEM OR CA	BLE LENGTH LONGUEUR DE TIGE OU CÂBLE	
36	36" STEM (STD LENGTH)	
60 **	60" CABLE (STD LENGTH)	
**	CUSTOM STEM OR CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING	MONTAGE	F
RC1	ROUND CANOPY / PAVILLON ROND SCREWLESS 0.5° CANOPY (2471C)	
	ISH FINI PAVILLON	
CANOPY FIN		
CANOPY FIN BLKE	BLACK FINE TEXTURE	
	BLACK FINE TEXTURE WHITE FINE TEXTURE	
BLKE WHE		
BLKE WHE	WHITE FINE TEXTURE	
BLKE WHE POWER COR	WHITE FINE TEXTURE D OR STEM FINISH FINI CABLE D'ALIMENTATION OU TIGE	
BLKE WHE POWER COR BLK WH	WHITE FINE TEXTURE D OR STEM FINISH FINI CABLE D'ALIMENTATION OU TIGE BLACK POWER CORD OR STEM	
BLKE WHE POWER COR BLK WH SHADE FINIS BLKE	WHITE FINE TEXTURE  D OR STEM FINISH FINI CABLE D'ALIMENTATION OU TIGE  BLACK POWER CORD OR STEM WHITE POWER CORD OR STEM  H FINI ABAT-JOUR BLACK FINE TEXTURE	
BLKE WHE POWER COR BLK WH SHADE FINIS BLKE WHE	WHITE FINE TEXTURE  DOR STEM FINISH FINI CABLE D'ALIMENTATION OU TIGE  BLACK POWER CORD OR STEM WHITE POWER CORD OR STEM  H FINI ABAT-JOUR BLACK FINE TEXTURE WHITE FINE TEXTURE	
BLKE WHE POWER COR BLK WH SHADE FINIS BLKE	WHITE FINE TEXTURE  DOR STEM FINISH FINI CABLE D'ALIMENTATION OU TIGE  BLACK POWER CORD OR STEM WHITE POWER CORD OR STEM WHITE POWER CORD OR STEM BLACK FINE TEXTURE BLACK FINE TEXTURE WHITE FINE TEXTURE PLEASE SPECIFY RAL CODE	
BLKE WHE POWER COR BLK WH SHADE FINIS BLKE WHE RAL*	WHITE FINE TEXTURE  DOR STEM FINISH FINI CABLE D'ALIMENTATION OU TIGE  BLACK POWER CORD OR STEM WHITE POWER CORD OR STEM  H FINI ABAT-JOUR  BLACK FINE TEXTURE WHITE FINE TEXTURE PLEASE SPECIFY RAL CODE +LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
BLKE WHE POWER COR BLK SHADE FINIS BLKE WHE RAL* DIFFUSER FI	WHITE FINE TEXTURE         DOR STEM FINISH FINI CABLE D'ALIMENTATION OU TIGE         BLACK POWER CORD OR STEM         WHITE POWER CORD OR STEM         H FINI ABAT-JOUR         BLACK FINE TEXTURE         WHITE FINE TEXTURE         PLEASE SPECIFY RAL CODE         •LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE         NISH FINI DIFFUSEUR	v
BLKE WHE POWER COR BLK WH SHADE FINIS BLKE RAL * DIFFUSER FI WH	WHITE FINE TEXTURE DOR STEM FINISH FINI CABLE D'ALIMENTATION OU TIGE BLACK POWER CORD OR STEM WHITE POWER CORD OR STEM H FINI ABAT-JOUR BLACK FINE TEXTURE WHITE FINE TEXTURE PLEASE SPECIFY RAL CODE *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE WHITE	
BLKE WHE POWER COR BLK WH SHADE FINIS BLKE RAL* DIFFUSER FI WH	WHITE FINE TEXTURE         DOR STEM FINISH FINI CABLE D'ALIMENTATION OU TIGE         BLACK POWER CORD OR STEM         WHITE POWER CORD OR STEM         H FINI ABAT-JOUR         BLACK FINE TEXTURE         WHITE FINE TEXTURE         PLEASE SPECIFY RAL CODE         •LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE         NISH FINI DIFFUSEUR	

EMERGENCY BATTERY ACCESSORY ACCESSOIRE BATTERIE D'URGENCE

ELECTRICAL BOX FOR EMB EMERGENCY BATTERY 3981EA

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT





# PHOTOMETRIC REPORT

# HENRI 4275-11

## 4275-11-LED.40.LO-WHE

CCT (K):	4000
Delivered Lumens (Im):	1096
System wattage (W)*:	11
Distribution:	Direct
Delivered Efficacy (Im/W):	96
Photometric type	С


## 4275-11-LED.40.REG-WHE


CCT (K):	4000
Delivered Lumens (Im):	1401
System wattage (W)*:	15
Distribution:	Direct
Delivered Efficacy (Im/W):	93
Photometric type	С


#### 4275-11-LED.40.HO-WHE

CCT (K):	4000
Delivered Lumens (Im):	1702
System wattage (W)*:	19
Distribution:	Direct
Delivered Efficacy (Im/W):	88
Photometric type	С

\*System wattage includes driver and LED module consumption

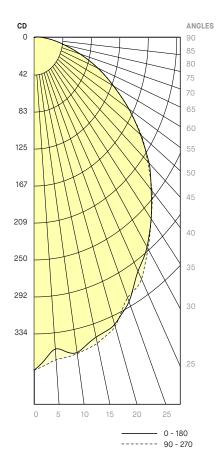

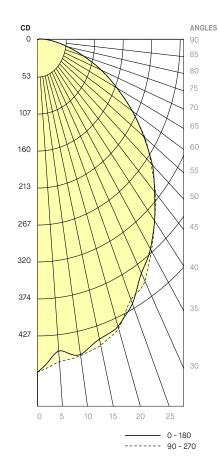

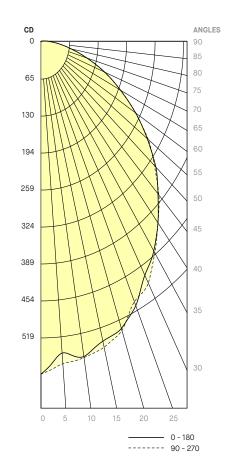



# PHOTOMETRIC REPORT

# HENRI 4275-17

## 4275-17-LED.40.LO-WHE

CCT (K):	4000
Delivered Lumens (Im):	2698
System wattage (W)*:	32
Distribution:	Direct
Delivered Efficacy (Im/W):	86
Photometric type	С

# 4275-17-LED.40.REG-WHE

CCT (K):	4000
Delivered Lumens (Im):	3428
System wattage (W)*:	41
Distribution:	Direct
Delivered Efficacy (Im/W):	82
Photometric type	С

#### 4275-17-LED.40.HO-WHE

CCT (K):	4000
Delivered Lumens (Im):	4278
System wattage (W)*:	52
Distribution:	Direct
Delivered Efficacy (Im/W):	79
Photometric type	С

\*System wattage includes driver and LED module consumption

