



INSTALLATION MAINTENANCE

New Construction - Series 1600 - Twist & Lock Trims
Nouvelle construction - Série 1600 - Encastrés Twist & Lock

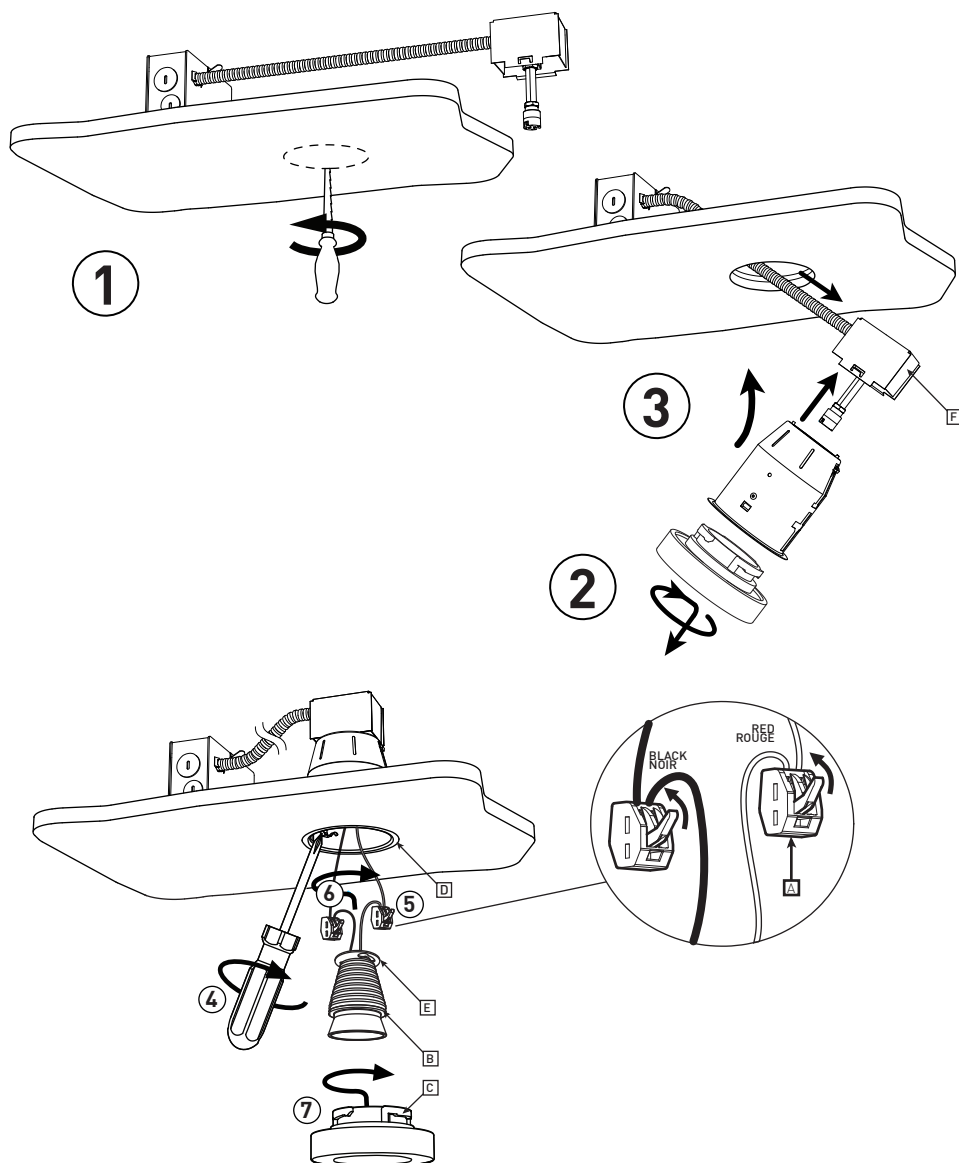


TRIMS ENCASTRÉS




1011




1013



1013BD




1014BD



1015BD

BULB AMPOULE



LED

INSTALLATION

- 1 - DETERMINE MOUNTING POSITION AND USE PLASTER FRAME LIP AS A GUIDE TO CUT HOLE IN CEILING. MODEL 15XXX-X.35 = Ø3.5"
- 2 - UNSCREW THE GLASS TRIM FROM THE CAN AND KEEP UNTIL STEP 7.
- 3 - MAKE THE ELECTRICAL CONNECTIONS (WIRE NUTS NOT SUPPLIED), PULL THE SOCKET ENCLOSURE [F] THROUGH THE HOLE AND INSTALL IT ONTO THE CAN. RE-INSERT CAN WITH SOCKET ENCLOSURE INTO HOLE.
- 4 - TIGHTEN MOUNTING CLIP SCREWS TO LOCK HOUSING IN POSITION.

MAINTENANCE

- 5 - INSERT THE WIRES TO THE CONNECTORS [A], THEN CLOSE THE CONNECTOR LEVERS.
- 5 - INSTALL THE LED MODULE [B] USING THE MOUNTING PLATE. ALIGN THE HOLES ON THE MOUNTING PLATE [E] WITH THE SCREW HEADS INSIDE THE HOUSING CAN [D] AND TWIST UNTIL LOCKED INTO PLACE.
- 7 - TWIST THE GLASS TRIM [C] INTO PLACE IN THE HOUSING CAN [D].

INSTALLATION

- 1 - DÉTERMINER LA POSITION DE L'ENCASTRÉ ET UTILISER LA BORDURE DU CADRE DE MONTAGE COMME GUIDE POUR DÉCOUPER L'OUVERTURE AU PLAFOND. MODÈLE 15XXX-X.35 = Ø3.5"
- 2 - DÉVISSEZ L'ENCASTRÉ EN VERRE DU CAISSON ET LE GARDER À PORTÉE DE MAIN JUSQU'À L'ÉTAPE 7.
- 3 - FAIRE LA CONNEXION DES FILS (MARRETTES NON INCLUSES), PASSER LA BOÎTE DE CONNEXION [F] DANS L'OUVERTURE ET L'INSTALLER SUR LE CAISSON. INSÉRER LE BOÎTIER DANS L'OUVERTURE.
- 4 - SERRER LES VIS DE MONTAGE POUR BLOQUER LE BOÎTIER EN PLACE.

MAINTENANCE

- 5 - FAIRE LA CONNEXION DES FILS AVEC LES CONNECTEURS [A]. FERMER LES LEVIERS DES CONNECTEURS PAR LA SUITE
- 6 - INSTALLER LE MODULE DEL [B] EN UTILISANT LES TROUS DE LA PLAQUE [E]. ALIGNER LES TROUS AVEC LES TÊTES DE VIS PUIS TOURNER DANS LE SENS D'UNE AIGUILLE D'UNE MONTRE.
- 7 - INSTALLER LA GARNITURE D'ENCASTRÉ [C] DANS LA CAISSON DU BOÎTIER [D].



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalinighting.com



1604C-9.35TL
Twist & Lock 1600 Series