

# BOUQUET 4428-16-RAQ

PROJECT PROJET
SPEC TYPE
NOTES




## OPTIONS



4901 DETAIL

4902 DETAIL

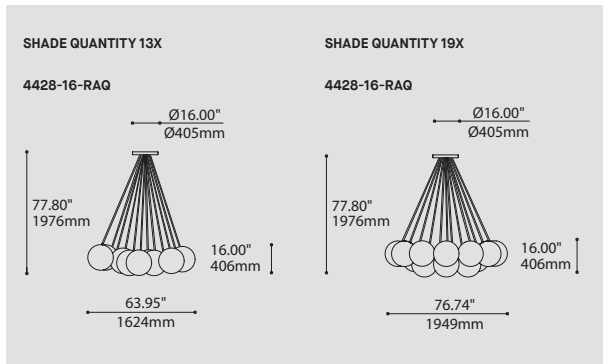

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL</b> MODÈLE		<b>4428-16-RAQ</b>
<b>4428-16-RAQ</b>	BOUQUET MIKA (RAQ) Ø16"	
<b>SHADE QUANTITY</b> QUANTITÉ D'ABAT-JOUR		
13 OR 19 SHADE		
<b>13</b>	13 X SHADES	
<b>19</b>	19 X SHADES	
<b>LIGHT SOURCE</b> SOURCE LUMINEUSE		<b>LED.13</b>
(WATTAGE, LAMP TYPE, OTHER INFO)		
<b>LED.13</b>	13W, LED	
<b>COLOR TEMPERATURE</b> TEMPÉRATURE DE COULEUR		
<b>30</b>	3000K	
<b>35</b>	3500K	
<b>40</b>	4000K	
<b>VOLTAGE</b> VOLTAGE		
<b>120V</b>	120 VOLT	
<b>277V</b>	277 VOLT	
<b>DIMMING OPTION</b> OPTION DE GRADATION		
<b>DV</b>	0-10V DIMMING (120-277V)	
<b>DP</b>	PHASE DIMMING (120V ONLY)	
	LED DIMMING DRIVER IS STANDARD IN THESE PRODUCTS, PLEASE SPECIFY YOUR DIMMING TYPE.	
<b>CABLE</b> CABLE		<b>C</b>
<b>C</b>	CLEAR CABLE, FIELD ADJUSTABLE	
<b>CABLE LENGTH</b> LONGUEUR DE CABLE		
<b>60</b>	60" CABLE (STD LENGTH)	
<b>**</b>	CUSTOM CABLE LENGTH (PLEASE SPECIFY)*	
	FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
<b>STRUCTURE FINISH</b> FINI STRUCTURE		<b>WHE</b>
<b>WHE*</b>	WHITE FINE TEXTURE	
	*CENTRAL PIECE IS ALWAYS BLACK	
<b>DIFFUSER FINISH</b> FINI DIFFUSEUR		<b>WH</b>
<b>WH</b>	WHITE	
<b>ACCESSORY</b> ACCESSOIRE		
<b>4901</b>	HOOK	
<b>4902</b>	LOOP	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



### DESIGN:

Offered in a wide variety of configurations, Bouquet is a cluster of 13 or 19 fixtures all emerging from the matte black recessed center hole of a white canopy. Bouquet can be paired with the adjustable cable holder accessories, Hook (4901) and Loop (4902), which can be easily installed and removed.

### INSTALLATION:

Bouquet mounts on standard junction boxes and is supplied with support hook for easy installation.

### LIGHT SOURCE:

High performance LED module with dimming options available.

### STRUCTURE:

Spun steel chrome plated canopy with matte black center hole to hide mounting hardware.

### CERTIFIED:

c-CSA-us

### CONCEPTION:

Offert dans une grande variété de configurations, Bouquet est un groupe de 13 ou 19 luminaires émergeant du trou encastré au centre d'un pavillon blanc. Bouquet peut être jumelé avec les accessoires serre-câble ajustable Hook (4901) et Loop (4902), qui peut être facilement installé ou retiré de l'assemblage.

### INSTALLATION:

Un crochet de support est fourni pour faciliter l'installation sur une boîte de jonction standard.

### SOURCE LUMINEUSE:

Module DEL à haute intensité offert avec choix de gradation standard.

### STRUCTURE:

Pavillon en acier repoussé et chromé avec section centrale noire mate pour camoufler les supports.

### CERTIFIÉ:

c-CSA-us


## FAMILY FAMILLE






4230-RAQ



4428-10-RAQ

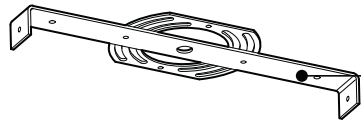


**EASY INSTALLATION**  
Mounts to standard junction box with added mounting points to reinforce installation

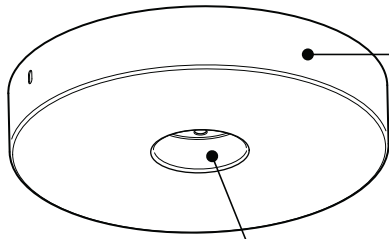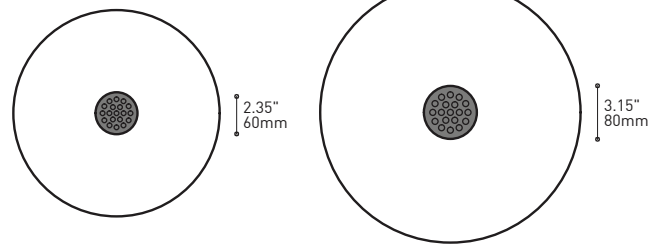

**SIMPLE CANOPY**  
Chrome plated canopy with plenty of room to house all electrical components for quick assembly



**CENTER PIECE**  
Matte black recessed center hole

Wide variety of configurations




## ACCESSORIES

Allows more creativity

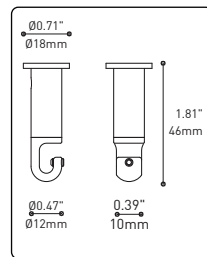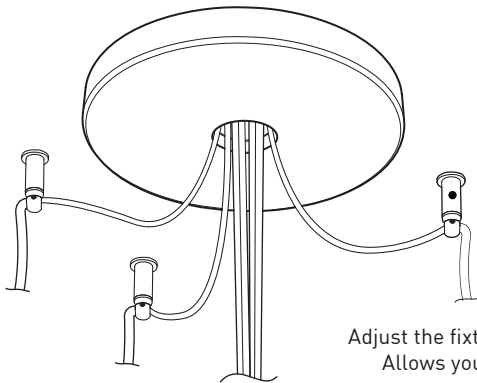


### HOOK 4901

Adjust the fixture to the desired height  
Allows you to make big statements




### LOOP 4902


Can straighten, lock height or group up to 19 power cables  
Can be installed after fixture installation

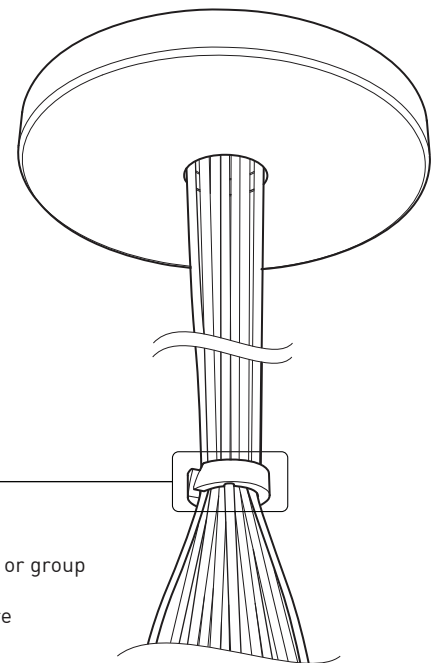

FIXTURE	CODE	Ø		LIGHT SOURCE		MAX. WATTAGE					
		10	16	LED	INC	LED			INC		
		Nb. FIXTURE				7	13	19	7	13	19
ALVER	MCC	7ou13	19	X	X	28W	52W	76W	420W	780W	1140W
ROLO PENDANT	MAD	7ou13	19	X		28W	52W	76W			
SPROKET	CFD	7ou13	19	X		28W	52W	76W			
MEHA	UAC	7ou13	19	X		28W	52W	76W			
FACET	UFC	7ou13	19	X		28W	52W	76W			
SLIM STACK	SLS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
STUBBY STACK	STS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
MIKA	RAP	7	13ou19	X		63W	117W	171W			
MIKA	RAQ	7	13ou19	X		91W	169W	247W			

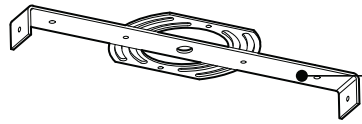


**FACILE D'ASSEMBLAGE**  
 -Installation sur boîte de jonction standard avec des points d'ancrage multiples  
 -Crochets de support fournis pour faciliter l'installation

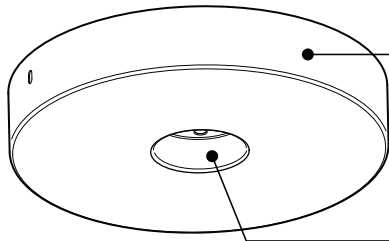


**PAVILLON SIMPLE**  
 Pavillon en acier repoussé et chromé avec espace nécessaire pour accueillir toutes les composants internes

**SECTION CENTRALE**  
 Pièce noir matte servant à camoufler les supports des fils

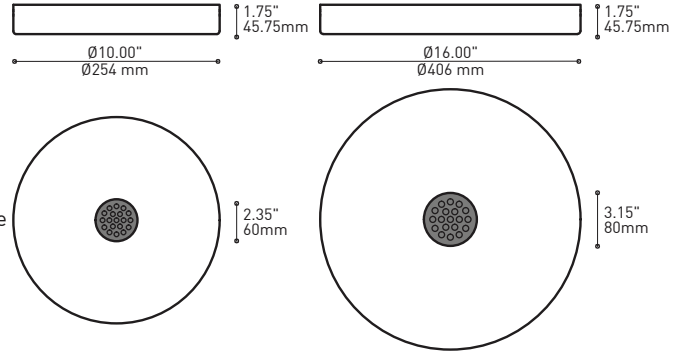


Grande variété de configurations




## ACCESSOIRES


Permet une plus grande créativité

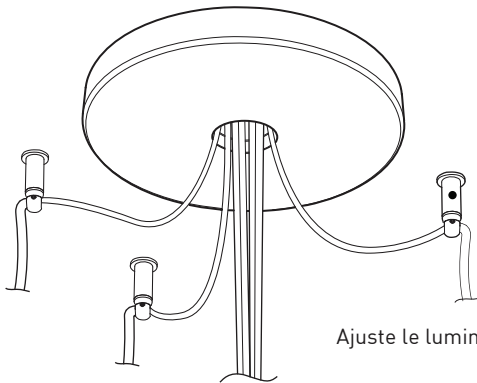

Ajuste le luminaire à la hauteur désirée

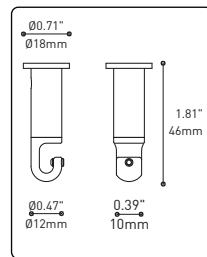


**CROCHET 4901**

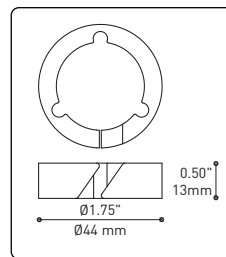

**ANNEAU 4902**

Redresse, organise et regroupe jusqu'à 19 câbles  
 Peut-être installé après l'installation du luminaire

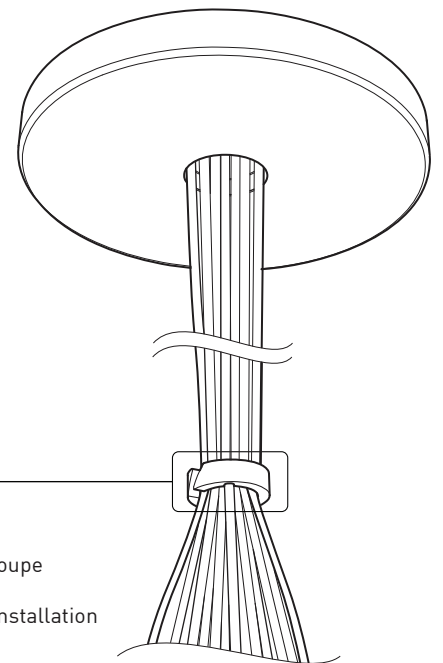

FIXTURE	CODE	SOURCE LUM.		MAX. WATTAGE							
		Ø 10	Ø 16	LED			INC				
		Nb. FIXTURE	LED	INC	7	13	19	7	13	19	
ALVER	MCC	7ou13	19	X	X	28W	52W	76W	420W	780W	1140W
ROLO PENDANT	MAD	7ou13	19	X		28W	52W	76W			
SPROKET	CFD	7ou13	19	X		28W	52W	76W			
MEHA	UAC	7ou13	19	X		28W	52W	76W			
FACET	UFC	7ou13	19	X		28W	52W	76W			
SLIM STACK	SLS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
STUBBY STACK	STS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
MIKA	RAP	7	13ou19	X		63W	117W	171W			
MIKA	RAQ	7	13ou19	X		91W	169W	247W			