

OUTLINE

7490XDI-72 UPLIGHT HO

CCT (K): 4000  
Delivered Lumens (lm): 8552  
System wattage (W)\*: 74.5  
Distribution: Indirect  
Delivered Efficacy (lm/W): 115  
Photometric type C

Luminous dimensions  
Luminous shape: Rectangle  
Units: in (mm)  
0-180 Axis: 3.9 (100)  
90-270 Axis: 78.7 (2000)  
Height: 0.0 (0)

7490XDI-72 UPLIGHT REG

CCT (K): 4000  
Delivered Lumens (lm): 5862  
System wattage (W)\*: 47.5  
Distribution: Indirect  
Delivered Efficacy (lm/W): 123  
Photometric type C




Luminous dimensions  
Luminous shape: Rectangle  
Units: in (mm)  
0-180 Axis: 3.9 (100)  
90-270 Axis: 78.7 (2000)  
Height: 0.0 (0)

7490XDI-72 UPLIGHT LOW

CCT (K): 4000  
Delivered Lumens (lm): 3005  
System wattage (W)\*: 22.9  
Distribution: Indirect  
Delivered Efficacy (lm/W): 131  
Photometric type C

Luminous dimensions  
Luminous shape: Rectangle  
Units: in (mm)  
0-180 Axis: 3.9 (100)  
90-270 Axis: 78.7 (2000)  
Height: 0.0 (0)

\*System wattage include driver and LED module consumption

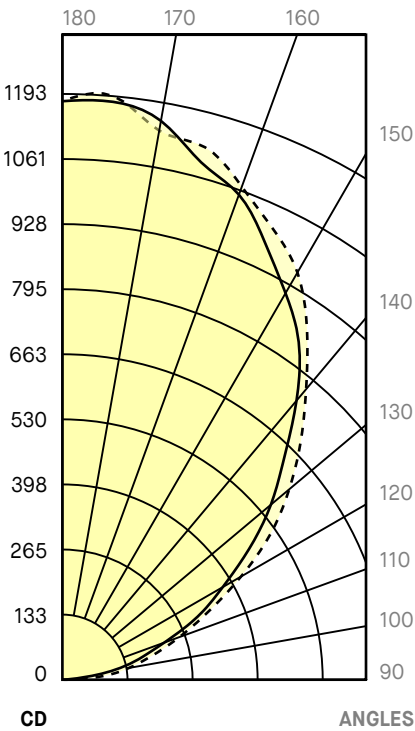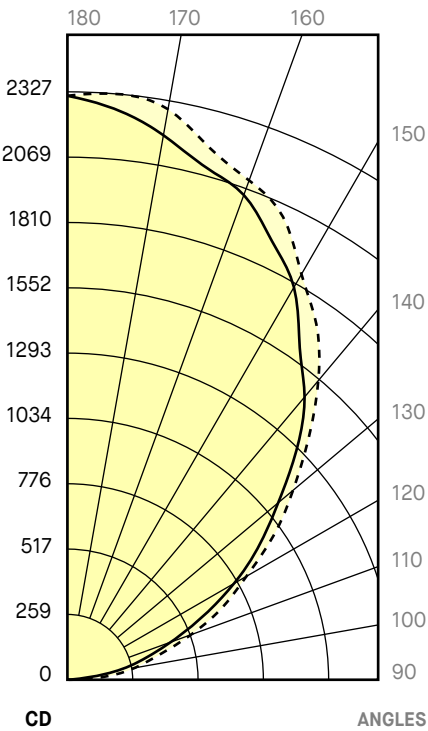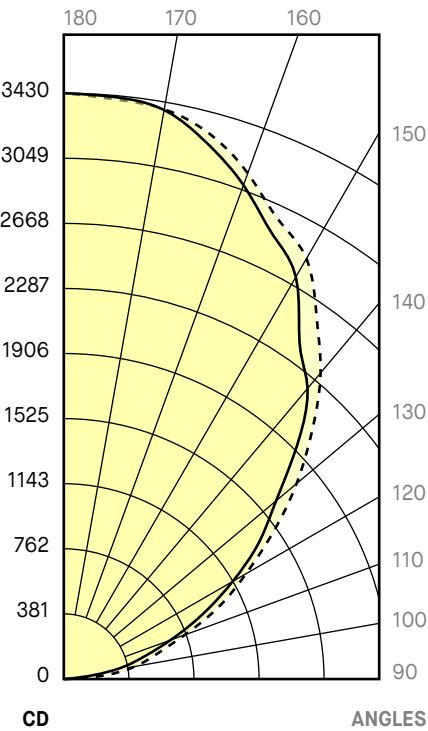

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.