

4234-LED-HO

CCT (K): 3500
 Delivered Lumens (lm): 1327
 System wattage (W)*: 14.5
 Distribution: Direct-Indirect
 Delivered Efficacy (lm/W): 91
 Photometric type: C



Luminous dimensions

Luminous shape: Circle
 Units: in (mm)
 0-180 Axis: 6 (152.4)
 90-270 Axis: 6 (152.4)
 Height: 24 (609.6)

Luminaire spacing criteria

2 luminaires, plane 0: 4.83
 2 luminaires, plane 90: 4.06
 4 luminaires: 4.17

*System wattage include driver and LED module consumption

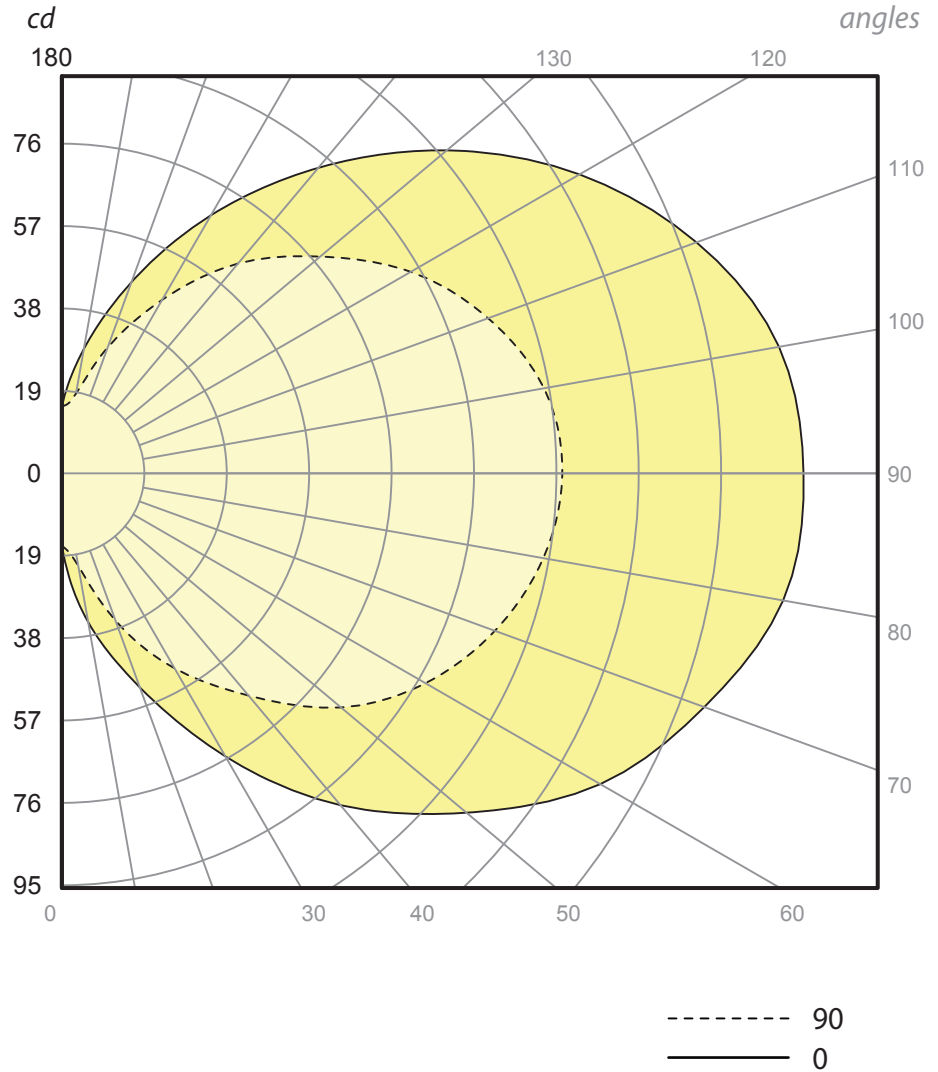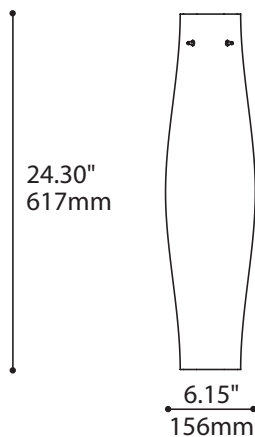

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.



EUREKA

225 de Liège Ouest, Suite #200
 Montréal (QC), Canada H2P 1H4
 Tel : 514.385.3515 Fax : 514.385.4169
 www.eurekalighting.com

4234