
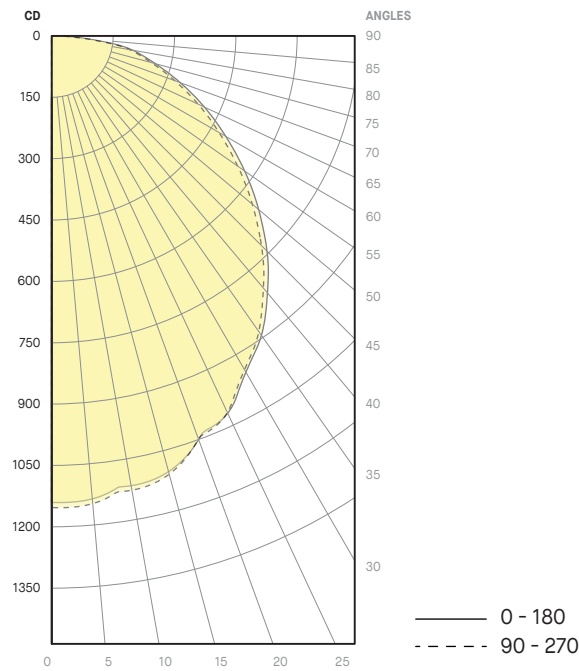


4830D-35-REG / 4730-35-REG

CCT (K):	4000
Delivered Lumens (lm):	11466
System wattage (W):	148.6
Distribution:	Direct
Delivered Efficacy (lm/W):	77

4830D-35-HO / 4730-35-HO

CCT (K):	4000
Delivered Lumens (lm):	16490
System wattage (W):	215.3
Distribution:	Direct
Delivered Efficacy (lm/W):	77

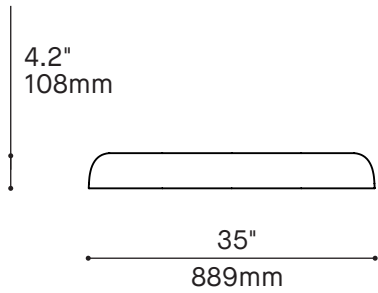

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.

4830I-35-REG

CCT (K):	4000
Delivered Lumens (lm):	2867
System wattage (W):	53.7
Distribution:	Indirect
Delivered Efficacy (lm/W):	84

4830I-35-HO

CCT (K):	4000
Delivered Lumens (lm):	4181
System wattage (W):	84
Distribution:	Indirect
Delivered Efficacy (lm/W):	78

