

3132-24 -LED REG CHR-WH

CCT (K): 3500
 Delivered Lumens (lm): 1741
 System wattage (W)*: 17W
 Distribution: Indirect
 Delivered Efficacy (lm/W): 102
 Photometric type: C

Luminous dimensions

Luminous shape: Rectangle
 Units: in (mm)
 0-180 Axis: 24 (609.6)
 90-270 Axis: 4.8 (121.92)
 Height: 1.2 (30.48)

*System wattage include driver and LED module consumption





3132-24 -LED HO CHR-WH

CCT (K): 3500
 Delivered Lumens (lm): 2540
 System wattage (W)*: 27W
 Distribution: Indirect
 Delivered Efficacy (lm/W): 82
 Photometric type: C

Luminous dimensions

Luminous shape: Rectangle
 Units: in (mm)
 0-180 Axis: 24 (609.6)
 90-270 Axis: 4.8 (121.92)
 Height: 1.2 (30.48)

*System wattage include driver and LED module consumption

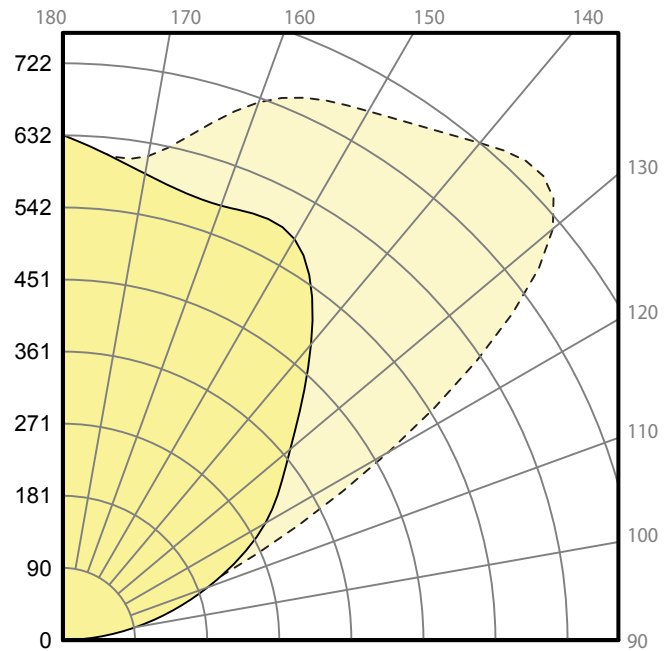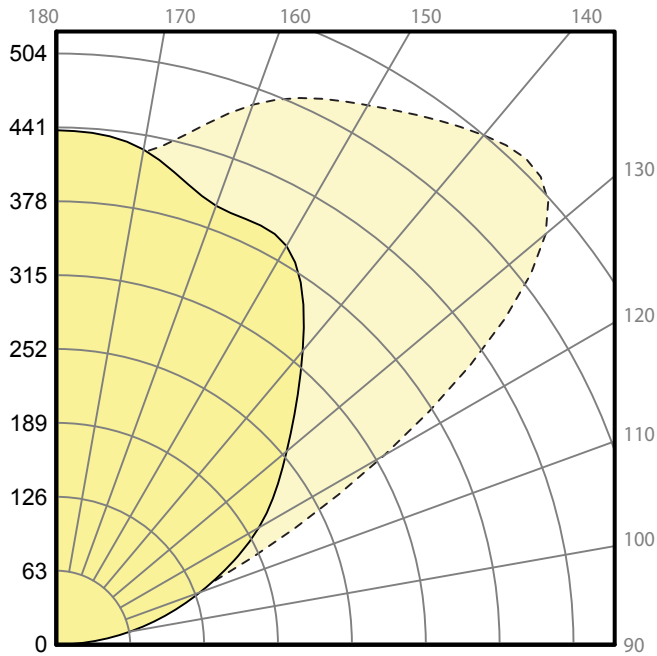

This photometric report has been generated using methods recommended by the IESNA. Calculations are based on simulated photometric data and can change without notice. End-user environment and application (including, but not limited to, voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided by the manufacturer. In no event will Eureka Lighting be responsible for any loss resulting from any use of this report.