

TUMBLER 4009

PROJECT PROJÉT

SPEC TYPE

NOTES



FINISH FINI




FAMILY FAMILLE



3409 (WALL SURFACE)

3409 (CEILING SURFACE)

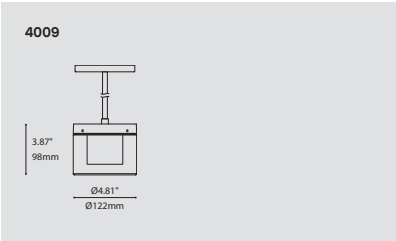





ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE	
MODEL MODÈLE				4009	
4009	TUMBLER				
LIGHT SOURCE SOURCE LUMINEUSE					
LED	REGULAR OUTPUT				
LED.HO	HIGH OUTPUT				
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR					
27	2700K				
30	3000K				
35	3500K				
40*	4000K				
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)				90	
90	90+ CRI				
VOLTAGE VOLTAGE					
120V	120 VOLT				
277V	277 VOLT				
CONTROL OPTION OPTION DE CONTRÔLE					
DP*	PHASE DIMMING (120V ONLY)				
DV*	0-10V DIMMING (120V-277V)				
* 3983 ACCESSORY IS PROVIDED FOR DIMMING OPTION					
STEM TIGE				\$10	
\$10	3/8" (10MM) STEM, NOT FIELD ADJUSTABLE				
STEM LENGTH LONGUEUR DE TIGE					
36	36" STEM (STD LENGTH)				
**	CUSTOM STEM LENGTH				
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
FINISH FINI					
BLKE	BLACK	CBE*	CHOCOLATE BROWN	NBE*	NAVY BLUE
WHE	WHITE	CPE*	CLAY PINK	SBE*	SAND BEIGE
CHM*	CHAMPAGNE METALLIC	DBE*	DYNAMIC BLUE	SGE*	SAGE GREY
SIM*	SILVER METALLIC	GGE*	GRASS GREEN	STE*	SUMMER TEAL
AYE*	APRICOT YELLOW	HGE*	HUNTER GREEN		
BRE*	BRICK RED	LNE*	LUNAR GREY		
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
** FINISH INCLUDES COLOR MATCH OF: HOUSING, STEM AND CANOPY					
DIFFUSER FINISH FINI DIFFUSEUR					
CFR	CLEAR-FROSTED				
CFRA	CLEAR-FROSTED ACRYLIC				
ACCESSORY ACCESSOIRE					
3983	DEEP JUNCTION BOX (PROVIDED FOR DIMMING OPTION)				

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	Tumbler is a small jewel made from tough machined glass. Its crisp, minimal form provides seamless accent illumination. Available on various stem lengths to adapt itself to any space. A highly powerful COB light source. Tumbler has an integral aluminum heatsink conceived and tested to provide a long lifetime.
LIGHT SOURCE:	
CANOPY:	Die-cast aluminum base, available in 14 textured finishes and 2 metallic finishes.
DIFFUSER:	Designed to be both beautiful and durable, Tumbler is a machined heavy glass with an inside frosted surface for better diffusion. An acrylic version is available (indoor use only).
CERTIFIED:	CSA Listed to US and Canadian safety standards; 25°C ambient. Tumbler can be used to comply with the requirements in 2022 Title 24, Part 6 JA8 High Luminous Efficacy Luminaire Requirements. FOR INDOOR USE ONLY.
CONCEPTION:	Le Tumbler est un petit bijou fait de verre machiné robuste. Sa forme géométrique simple procure une lumière ambiante diffuse. Offert sur diverses longueurs de tiges pour s'intégrer dans tous espaces.
SOURCE LUMINEUSE:	Une source lumineuse munie d'un COB très puissant. Le Tumbler intègre un dissipateur de chaleur testé pour prolonger sa durée de vie.
PAVILLON:	Base en aluminium moulé sous pression, disponible avec 14 choix de finitions texturée et 2 options de finis métalliques.
DIFFUSEUR:	Conçu pour être à la fois beau et durable, le Tumbler est machiné à même un bloc de verre et est ensuite givré à l'intérieur pour une meilleure diffusion. Une version en acrylique est offerte (application intérieur seulement).
CERTIFIÉ:	Homologué CSA aux standards UL Canada et É.-U. ~ Température 25°C. Tumbler peut être utilisé pour se conformer aux exigences de la norme Title 24 de 2022, Partie 6 JA8 concernant les luminaires à haute efficacité lumineuse. POUR APPLICATION INTÉRIEUR SEULEMENT.

TUMBLER 4009

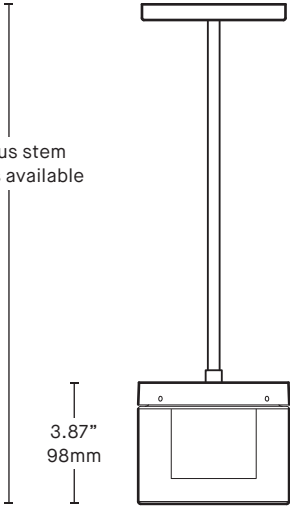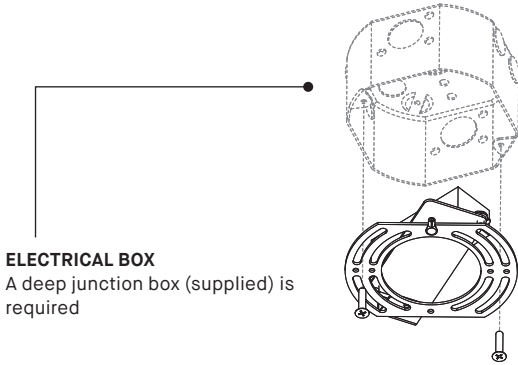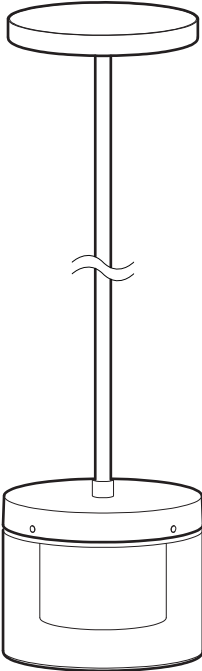

ELECTRICAL BOX
A deep junction box (supplied) is required

Various stem lengths available

3.87"
98mm

Ø4.81"
Ø122mm

EASY AND SECURE
Glass held in place with 4 stainless steel set screws, for easy installation

INTERNAL OPTICAL DIFFUSER
High quality silicone diffuser

INTEGRATED HEATSINK
Machined aluminum heatsink tested to assure a long lifetime

BEAUTIFUL AND DURABLE
The Tumbler is composed of a machined heavy glass with a frosted interior for better diffusion. An acrylic version is available (indoor use only)

POWERFUL SOURCE
The LED light source composed of a powerful COB is offered in 2 outputs.

PRECIOUS JEWEL
Its crisp, minimal form provides seamless accent illumination for any space


INDOOR USE ONLY

PRODUCT SPECIFICATION	4009 CFR		4009 CFRA (ACRYLIC)	
	REG	HO	REG	HO
PERFORMANCE				
SYSTEM WATTAGE	3.7 W	7.9 W	3.7 W	7.9 W
DELIVERED LUMENS (4000K)	399 LM	801 LM	399 LM	801 LM
EFFICACY	107 LM/W	102 LM/W	107 LM/W	102 LM/W
OTHER INFORMATION				
DIFFUSER	CLEAR MACHINED GLASS WITH INSIDE FROSTED	CLEAR MACHINED GLASS WITH INSIDE FROSTED	CLEAR MACHINED ACRYLIC WITH INSIDE FROSTED	CLEAR MACHINED ACRYLIC WITH INSIDE FROSTED
LUMINAIRE'S WEIGHT	5.0 LBS / 2.26 KG	5.0 LBS / 2.26 KG	2.8 LBS / 1.27 KG	2.8 LBS / 1.27 KG
L70 (LUMEN MAINTENANCE)	> 60 000 HRS	> 60 000 HRS	> 60 000 HRS	> 60 000 HRS

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.96
90+	3000K	0.94
90+	2700K	0.90

LIGHT DISTRIBUTION

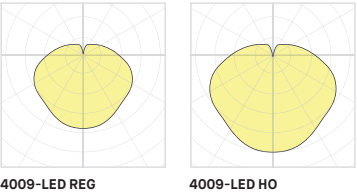






Visit our website for warranty terms and conditions.

TUMBLER 4009

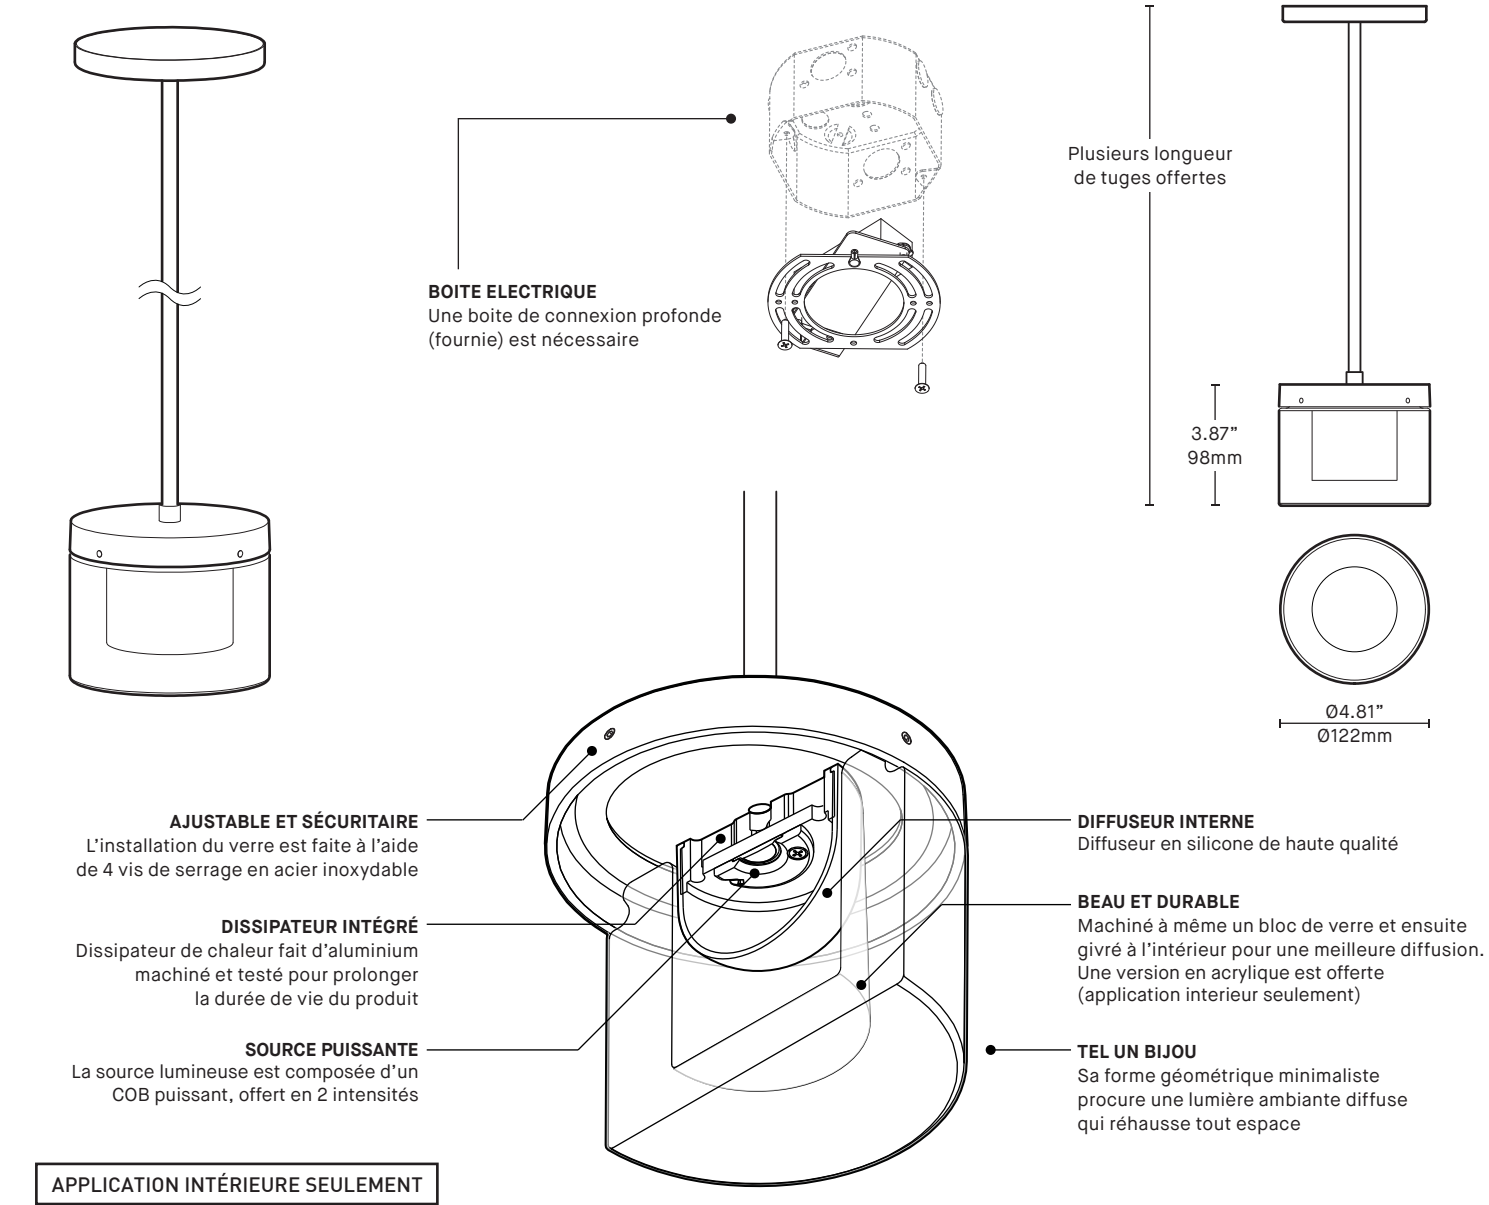


SPÉCIFICATION PRODUIT	4009 CFR		4009 CFRA (ACRYLIQUE)	
	REG	HO	REG	HO
PERFORMANCE				
PUISSANCE TOTALE	3.7 W	7.9 W	3.7 W	7.9 W
LUMENS RÉELS (4000K)	399 LM	801 LM	399 LM	801 LM
EFFICACITÉ	107 LM/W	102 LM/W	107 LM/W	102 LM/W
AUTRES INFORMATIONS				
DIFFUSEUR	VERRE TRANSPARENT MACHINÉ AVEC INTÉRIEUR GIVRÉ	VERRE TRANSPARENT MACHINÉ AVEC INTÉRIEUR GIVRÉ	ACRYLIQUE TRANSPARENT MACHINÉ AVEC INTÉRIEUR GIVRÉ	ACRYLIQUE TRANSPARENT MACHINÉ AVEC INTÉRIEUR GIVRÉ
POIDS DU LUMINAIRE	5.0 LBS / 2.26 KG	5.0 LBS / 2.26 KG	2.8 LBS / 1.27 KG	2.8 LBS / 1.27 KG
L70 (MAINTENANCE DE LA LUMIÈRE)	> 60 000 HRS	> 60 000 HRS	> 60 000 HRS	> 60 000 HRS

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
90+	4000K	1.00
90+	3500K	0.96
90+	3000K	0.94
90+	2700K	0.90

DISTRIBUTION LUMINEUSE

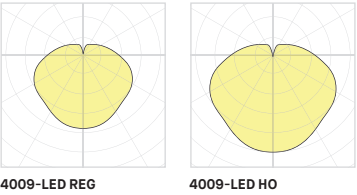

5 ans de garantie

Visitez notre site Web pour les termes et conditions.